


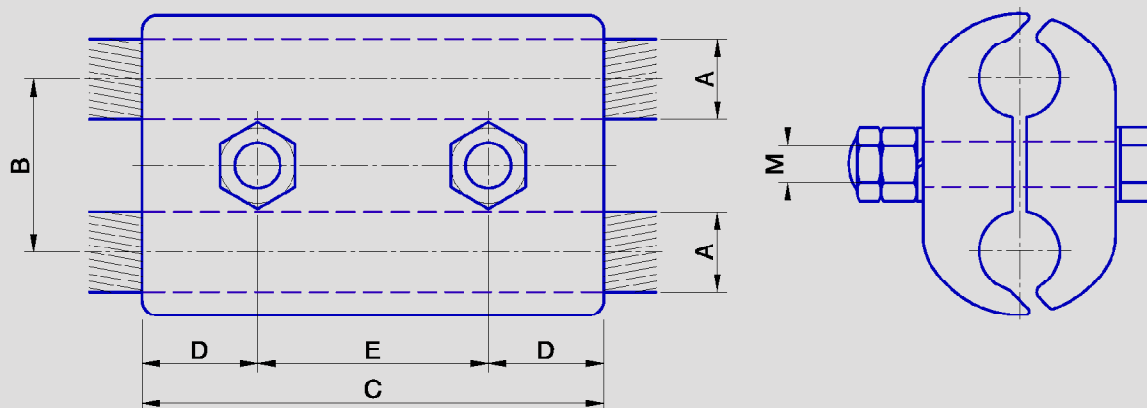

Kataloški broj Catalogue No.	Prečnik provodnika Conductor Diameter		Dimenzije - Dimensions					Težina Weight
	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	M (mm)	(≈kg)	
A00 6 6	5 - 8	24	60	15	30	2xM8	0,300	
A00 10 10	8 - 11	30	80	20	40	2xM10	0,520	
A00 12 12	11 - 14	32	80	20	40	2xM10	0,650	
A00 15 15	14 - 17	34	120	20	40	3xM12	1,000	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor for which the connector is to be applied to.

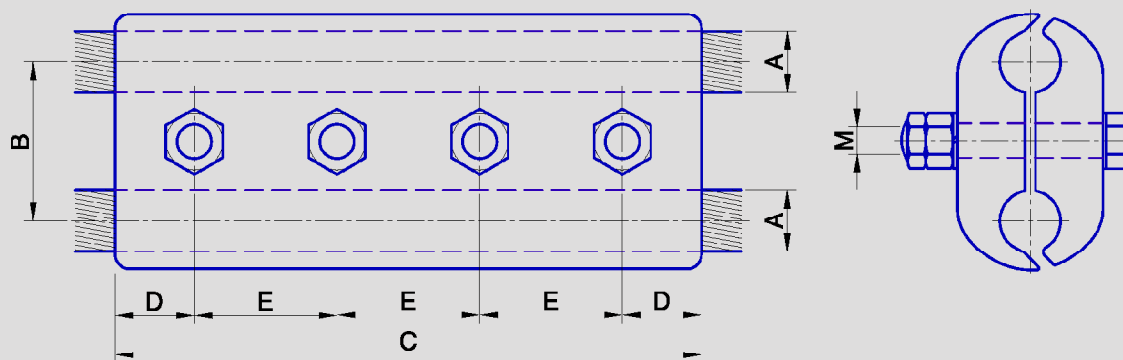

Kataloški broj Catalogue No.	Prečnik provodnika Conductor Diameter A (mm)	Dimenzije - Dimensions					Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	M (mm)	
A00 18 18	17 – 20	36	120	20	40	3xM12	1,150
A00 22 22	20 – 23	39	135	22,5	45	3xM12	1,300
A00 25 25	23 – 26	42	160	20	40	4xM12	2,000
A00 27 27	26 – 29	47	180	22,5	45	4xM14	2,350
A00 30 30	29 – 32	50	200	25	50	4xM14	2,750

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor for which the connector is to be applied to.

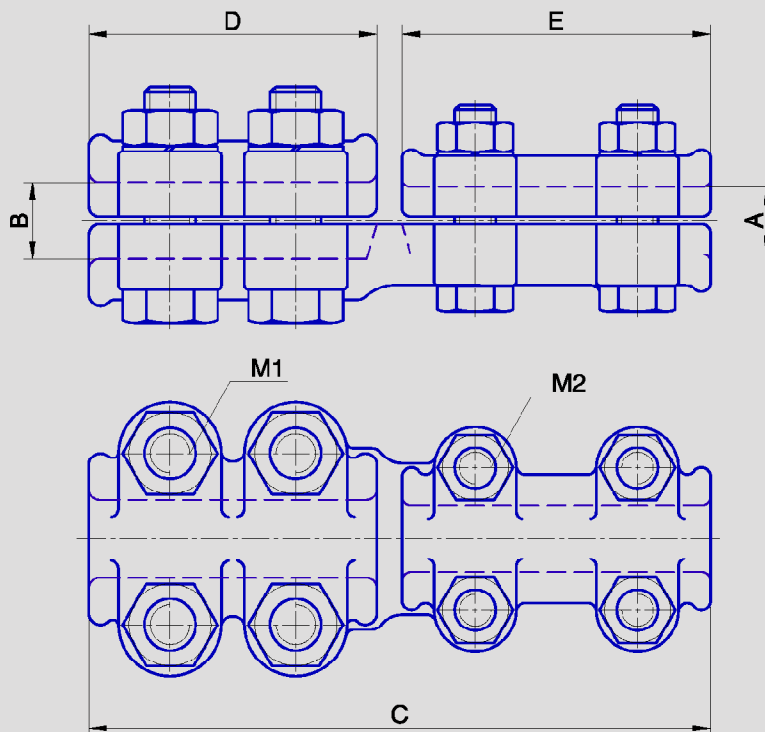

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>					Težina <i>Weight</i>
	Provodnik	Bolcn ili cev	C	D	E	M1	M2	
	<i>Conductor</i>	<i>Rivet or tube</i>						
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
A11 6 10	5 – 8	5 – 10	90	40	40	M6	M6	0,400
A11 6 20	5 – 8	10 – 20	90	40	40	M8	M6	0,500
A11 10 10	8 – 11	5 – 10	110	50	50	M6	M6	0,600
A11 10 20	8 – 11	10 – 20	110	50	50	M8	M6	0,700
A11 12 20	11 – 14	10 – 20	120	50	60	M10	M8	0,900
A11 12 30	11 – 14	20 – 30	120	50	60	M10	M8	1,000
A11 15 20	14 – 17	10 – 20	140	60	70	M10	M10	1,200
A11 15 30	14 – 17	20 – 30	140	60	70	M10	M10	1,300
A11 18 20	17 – 20	10 – 20	150	60	80	M10	M10	1,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

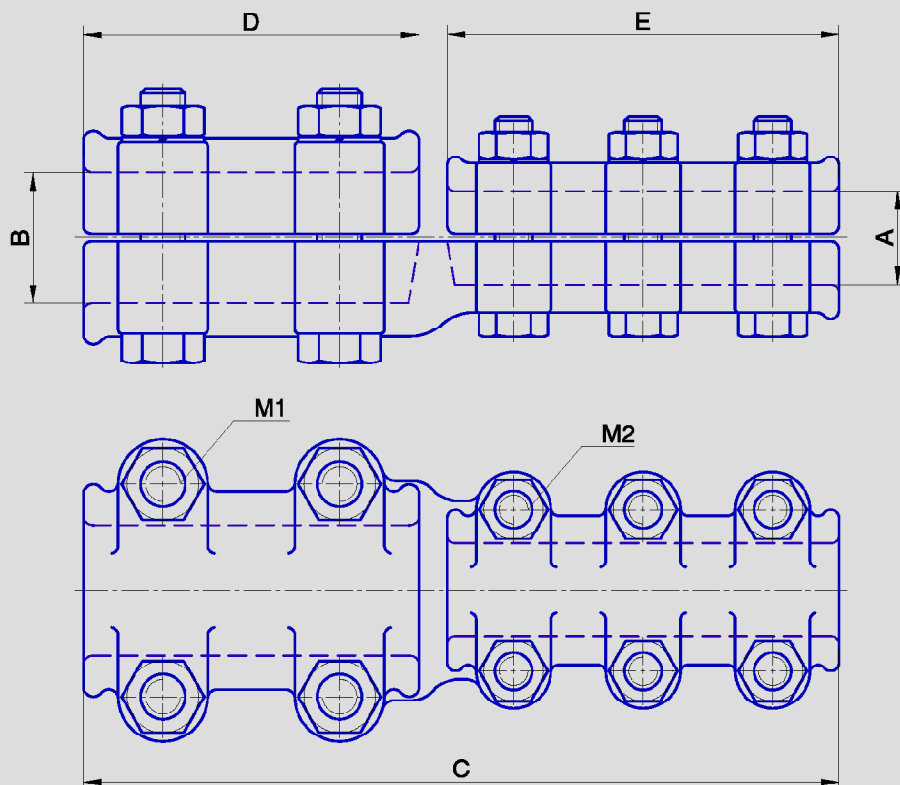

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
A11 18 30	17 – 20	20 – 30	180	80	90	M10	M10	1,600
A11 18 40	17 – 20	30 – 40	180	80	90	M12	M10	1,700
A11 22 30	20 – 23	20 – 30	205	90	105	M10	M10	1,850
A11 22 40	20 – 23	30 – 40	205	90	105	M12	M10	1,950
A11 25 30	23 – 26	20 – 30	205	90	105	M12	M10	2,100
A11 25 40	23 – 26	30 – 40	205	90	105	M12	M10	2,200
A11 27 30	26 – 29	20 – 30	230	100	120	M12	M12	2,400
A11 27 40	26 – 29	30 – 40	230	100	120	M12	M12	2,500
A11 30 30	29 – 32	20 – 30	245	100	135	M12	M12	2,700
A11 30 40	29 – 32	30 – 40	245	100	135	M12	M12	2,850
A11 30 50	29 – 32	40 – 50	245	100	135	M12	M12	3,000

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

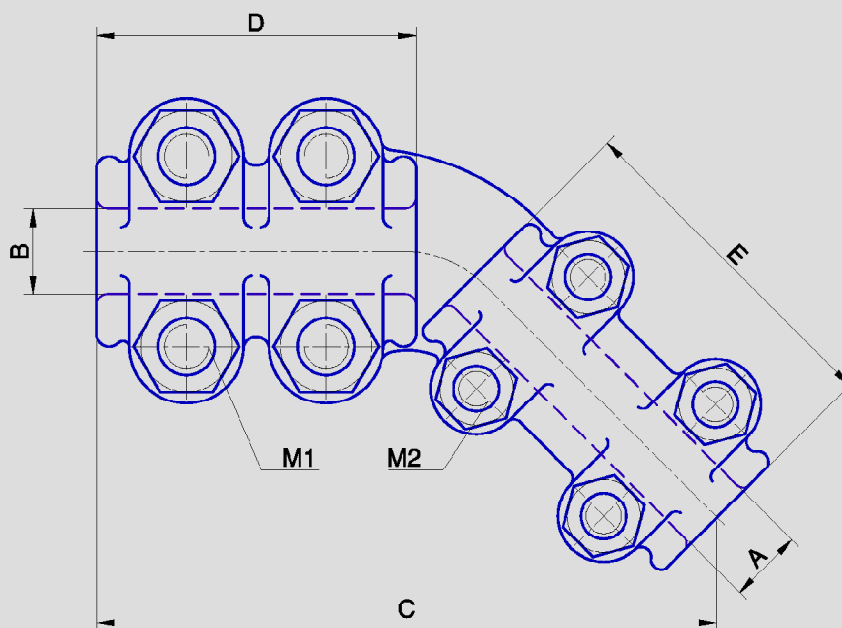

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Boln ili cev Rivet or tube B (mm)	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
A12 6 10	5 – 8	5 – 10	80	40	40	M6	M6	0,450
A12 6 20	5 – 8	10 – 20	80	40	40	M8	M6	0,550
A12 10 10	8 – 11	5 – 10	100	50	50	M6	M6	0,680
A12 10 20	8 – 11	10 – 20	100	50	50	M8	M6	0,770
A12 12 20	11 – 14	10 – 20	110	50	60	M10	M8	0,980
A12 12 30	11 – 14	20 – 30	110	50	60	M10	M8	1,150
A12 15 20	14 – 17	10 – 20	125	60	70	M10	M10	1,350
A12 15 30	14 – 17	20 – 30	125	60	70	M10	M10	1,450
A12 18 20	17 – 20	10 – 20	135	60	80	M10	M10	1,680

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn boln ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

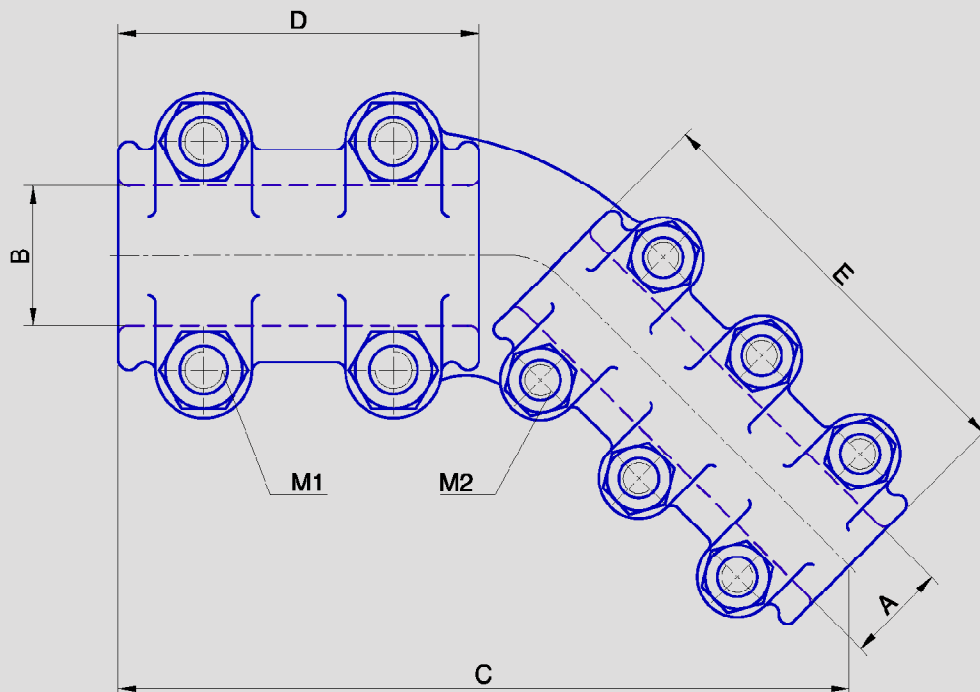

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Bolcn ili cev Rivet or tube B (mm)	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
A12 18 30	17 – 20	20 – 30	170	80	90	M10	M10	1,700
A12 18 40	17 – 20	30 – 40	170	80	90	M12	M10	1,800
A12 22 30	20 – 23	20 – 30	190	90	105	M10	M10	1,950
A12 22 40	20 – 23	30 – 40	190	90	105	M12	M10	2,100
A12 25 30	23 – 26	20 – 30	195	90	105	M12	M10	2,200
A12 25 40	23 – 26	30 – 40	195	90	105	M12	M10	2,300
A12 27 30	26 – 29	20 – 30	215	100	120	M12	M12	2,400
A12 27 40	26 – 29	30 – 40	215	100	120	M12	M12	2,600
A12 30 30	29 – 32	20 – 30	230	100	135	M12	M12	2,800
A12 30 40	29 – 32	30 – 40	230	100	135	M12	M12	2,900
A12 30 50	29 – 32	40 – 50	230	100	135	M12	M12	3,100

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

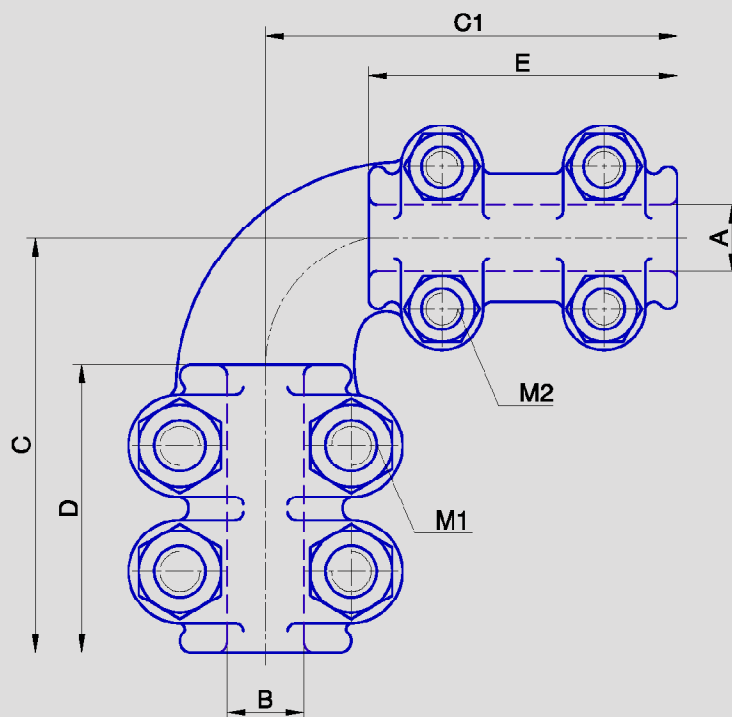

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Bolcn ili cev Rivet or tube B (mm)	C (mm)	C1 (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
A13 6 10	5 – 8	5 – 10	70	70	40	40	M6	M6	0,480
A13 6 20	5 – 8	10 – 20	70	75	40	40	M8	M6	0,600
A13 10 10	8 – 11	5 – 10	80	80	50	50	M6	M6	0,720
A13 10 20	8 – 11	10 – 20	80	85	50	50	M8	M6	0,840
A13 12 20	11 – 14	10 – 20	85	95	50	60	M10	M8	1,080
A13 12 30	11 – 14	20 – 30	85	105	50	60	M10	M8	1,200
A13 15 20	14 – 17	10 – 20	100	110	60	70	M10	M10	1,440
A13 15 30	14 – 17	20 – 30	100	115	60	70	M10	M10	1,560
A13 18 20	17 – 20	10 – 20	100	120	60	80	M10	M10	1,800

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

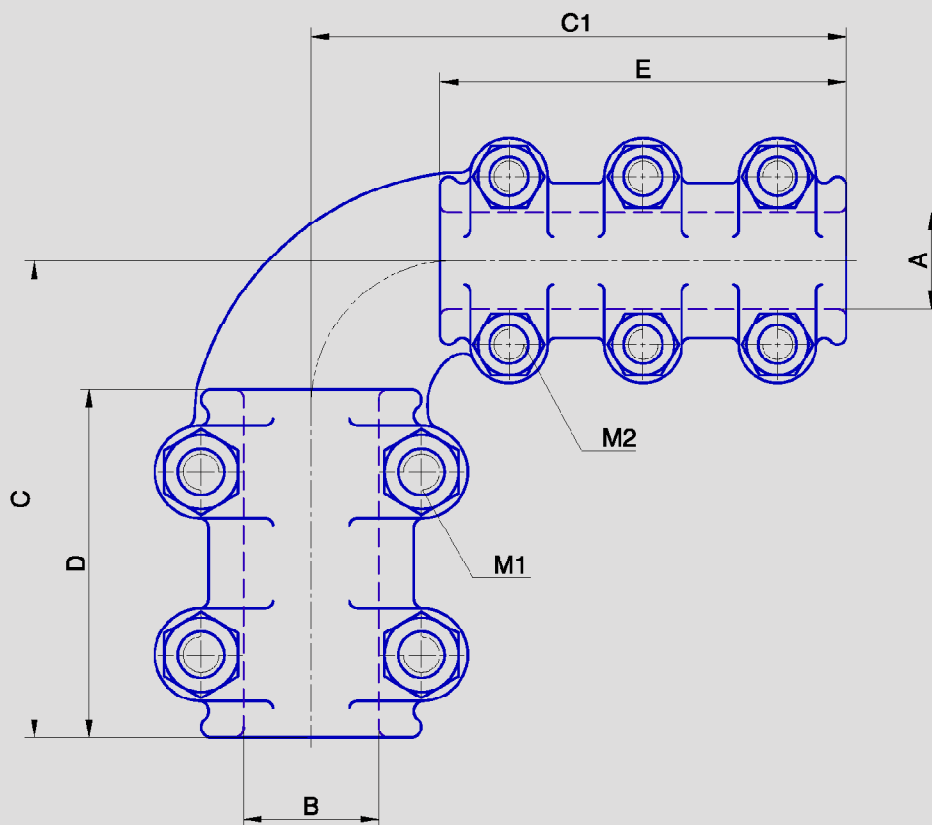

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	C1	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
A13 18 30	17 – 20	20 – 30	120	130	80	90	M10	M10	1,800
A13 18 40	17 – 20	30 – 40	120	135	80	90	M12	M10	1,900
A13 22 30	20 – 23	20 – 30	130	145	90	105	M10	M10	2,000
A13 22 40	20 – 23	30 – 40	130	150	90	105	M10	M10	2,100
A13 25 30	23 – 26	20 – 30	135	145	90	105	M10	M10	2,400
A13 25 40	23 – 26	30 – 40	135	150	90	105	M12	M10	2,550
A13 27 30	26 – 29	20 – 30	145	165	100	120	M12	M12	2,650
A13 27 40	26 – 29	30 – 40	145	170	100	120	M12	M12	2,800
A13 30 30	29 – 32	20 – 30	150	180	100	135	M12	M12	2,900
A13 30 40	29 – 32	30 – 40	150	185	100	135	M12	M12	3,000
A13 30 50	29 – 32	40 – 50	150	190	100	135	M12	M12	3,200

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

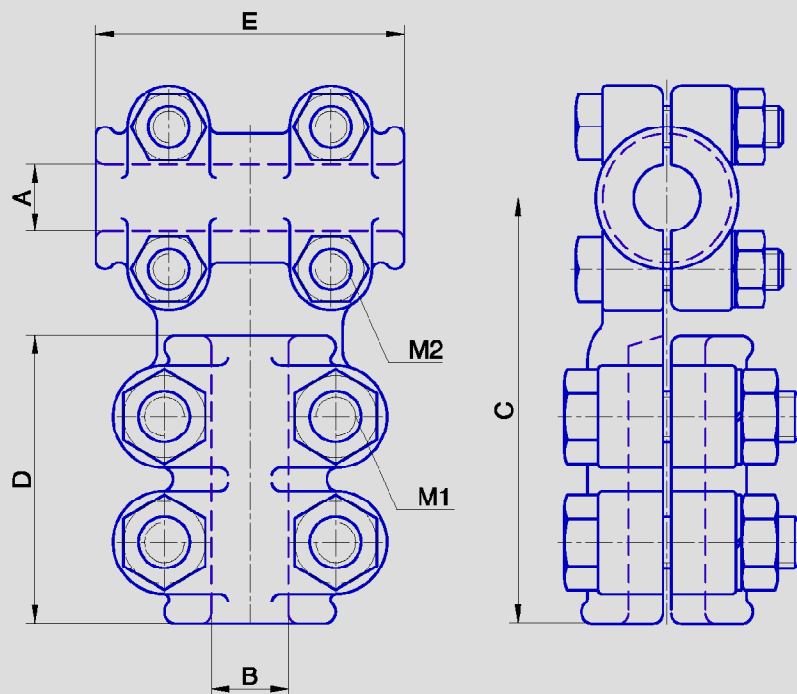

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Bolcn ili cev Rivet or tube B (mm)	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
A14 6 10	5 – 8	5 – 10	65	40	40	M6	M6	0,450
A14 6 20	5 – 8	10 – 20	65	40	40	M8	M6	0,550
A14 10 10	8 – 11	5 – 10	75	50	50	M6	M6	0,650
A14 10 20	8 – 11	10 – 20	75	50	50	M8	M6	0,750
A14 12 20	11 – 14	10 – 20	80	50	60	M10	M8	0,950
A14 12 30	11 – 14	20 – 30	80	50	60	M10	M8	1,050
A14 15 20	14 – 17	10 – 20	95	60	70	M10	M10	1,250
A14 15 30	14 – 17	20 – 30	95	60	70	M10	M10	1,350
A14 18 20	17 – 20	10 – 20	95	60	80	M10	M10	1,550

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

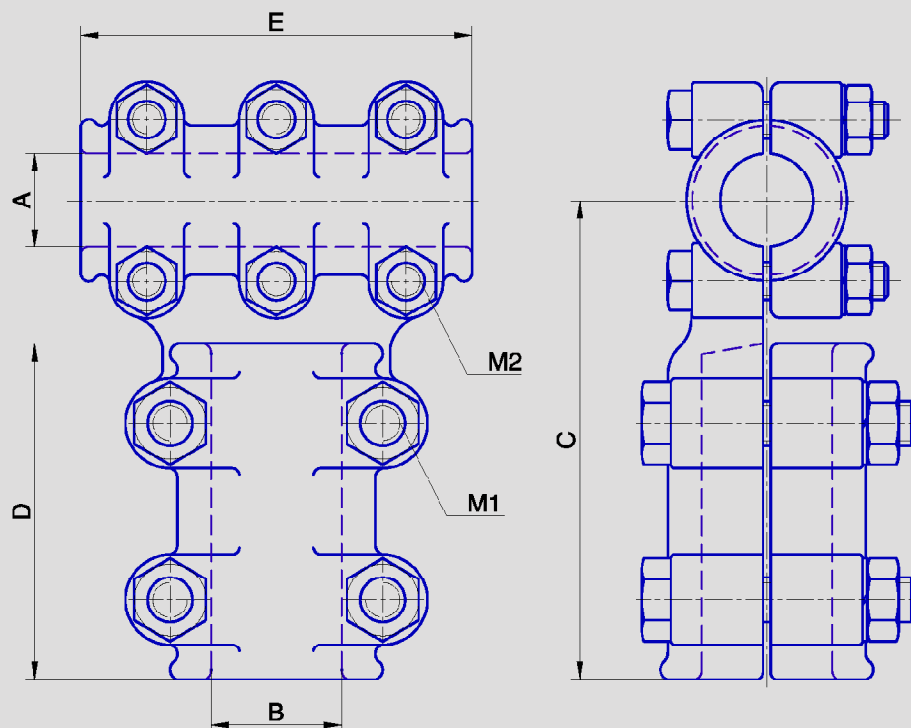

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
A14 18 30	17 – 20	20 – 30	115	80	90	M10	M10	1,600
A14 18 40	17 – 20	30 – 40	115	80	90	M12	M10	1,700
A14 22 30	20 – 23	20 – 30	125	90	105	M10	M10	1,850
A14 22 40	20 – 23	30 – 40	125	90	105	M12	M10	1,950
A14 25 30	23 – 26	20 – 30	130	90	105	M12	M10	2,100
A14 25 40	23 – 26	30 – 40	130	90	105	M12	M10	2,200
A14 27 30	26 – 29	20 – 30	140	100	120	M12	M12	2,400
A14 27 40	26 – 29	30 – 40	140	100	120	M12	M12	2,500
A14 30 30	29 – 32	20 – 30	145	100	135	M12	M12	2,700
A14 30 40	29 – 32	30 – 40	145	100	135	M12	M12	2,850
A14 30 50	29 – 32	40 – 50	145	100	135	M12	M12	3,000

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

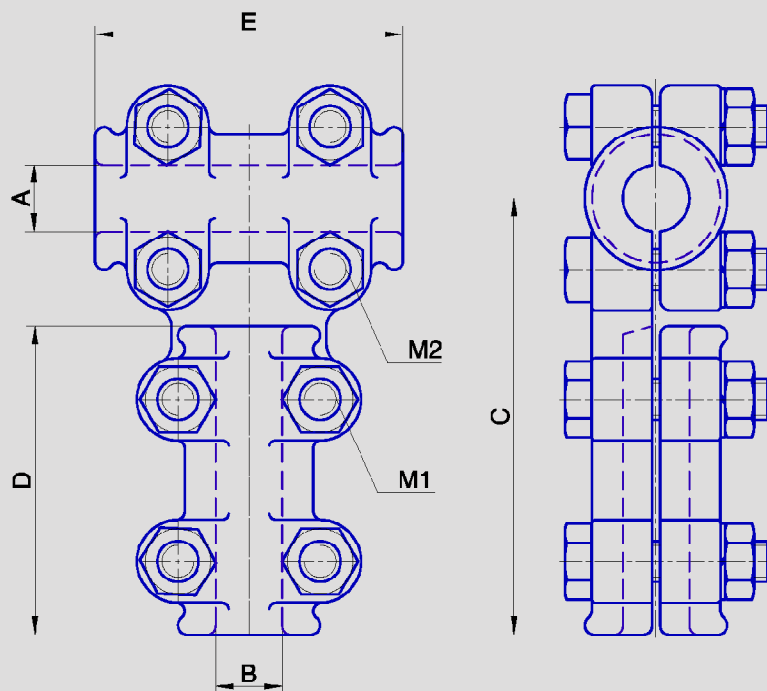

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>						Težina <i>Weight</i> (≈kg)
	Provodnik <i>Conductor</i>	Provodnik <i>Conductor</i>	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)		
	A (mm)	B (mm)							
A04 6 6	5 – 8	5 – 8	65	40	40	M6	M6	0,450	
A04 6 10	5 – 8	8 – 11	75	50	40	M6	M6	0,550	
A04 10 6	8 – 11	5 – 8	65	40	50	M6	M6	0,600	
A04 10 10	8 – 11	8 – 11	75	50	50	M6	M6	0,750	
A04 12 10	11 – 14	8 – 11	80	50	60	M6	M8	0,900	
A04 12 12	11 – 14	11 – 14	90	60	60	M8	M8	1,000	
A04 15 12	14 – 17	11 – 14	95	60	70	M8	M10	1,150	
A04 15 15	14 – 17	14 – 17	105	70	70	M10	M10	1,300	
A04 18 12	17 – 20	11 – 14	95	60	80	M8	M10	1,400	
A04 18 15	17 – 20	14 – 17	105	70	80	M10	M10	1,500	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductore.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors for which the connector is to be applied to.

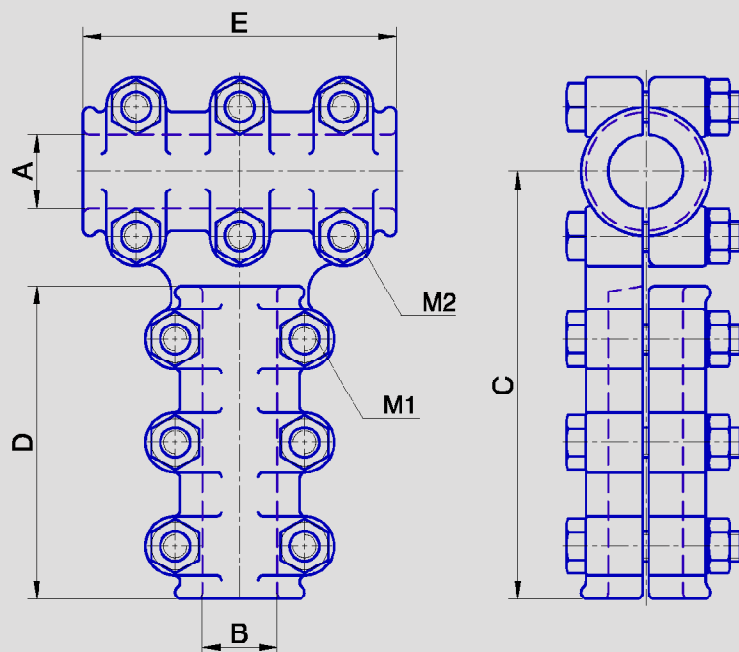

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Provodnik Conductor	C	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
A04 18 18	17 – 20	17 – 20	125	90	90	M10	M10	1,800
A04 22 12	20 – 23	11 – 14	95	60	105	M8	M10	1,650
A04 22 15	20 – 23	14 – 17	110	75	105	M8	M10	1,800
A04 22 18	20 – 23	17 – 20	125	90	105	M10	M10	1,950
A04 22 22	20 – 23	20 – 23	145	105	105	M10	M10	2,100
A04 25 15	23 – 26	14 – 17	115	75	105	M8	M10	1,950
A04 25 18	23 – 26	17 – 20	130	90	105	M10	M10	2,100
A04 25 22	23 – 26	20 – 23	145	105	105	M10	M10	2,250
A04 25 25	23 – 26	23 – 26	145	105	105	M10	M10	2,400
A04 27 18	26 – 29	17 – 20	135	90	120	M10	M12	2,100
A04 27 22	26 – 29	20 – 23	150	105	120	M10	M12	2,400
A04 27 25	26 – 29	23 – 26	150	105	120	M10	M12	2,550
A04 27 27	26 – 29	26 – 29	165	120	120	M12	M12	2,700
A04 30 18	29 – 32	17 – 20	135	90	135	M10	M12	2,400
A04 30 22	29 – 32	20 – 23	150	105	135	M10	M12	2,550
A04 30 25	29 – 32	23 – 26	150	105	135	M10	M12	2,700
A04 30 27	29 – 32	26 – 29	165	120	135	M12	M12	2,850
A04 30 30	29 – 32	29 – 32	180	135	135	M12	M12	3,000

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors for which the connector is to be applied to.

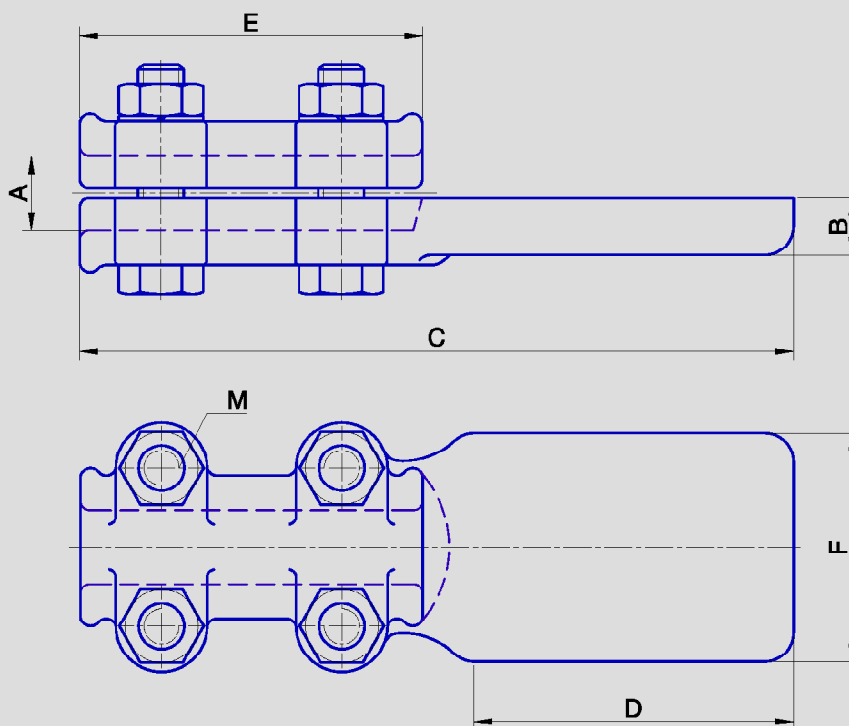

Kataloški broj <i>Catalogue No.</i>	Prečnik provodnika <i>Conductor diameter</i>	Dimenzije - <i>Dimensions</i>						Težina <i>Weight</i>	
			B	C	D	E	F		M
		A (mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
A21 6 30	5 – 8	8	85	30	40	25	M6	0,200	
A21 10 30	8 – 11	8	95	30	50	30	M6	0,250	
A21 10 40	8 – 11	8	105	40	50	30	M6	0,300	
A21 12 40	11 – 14	10	115	40	60	40	M8	0,380	
A21 12 50	11 – 14	10	125	50	60	40	M8	0,450	
A21 15 50	14 – 17	10	135	50	70	50	M10	0,550	
A21 15 60	14 – 17	10	145	60	70	50	M10	0,650	
A21 18 60	17 – 20	10	155	60	80	60	M10	0,800	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

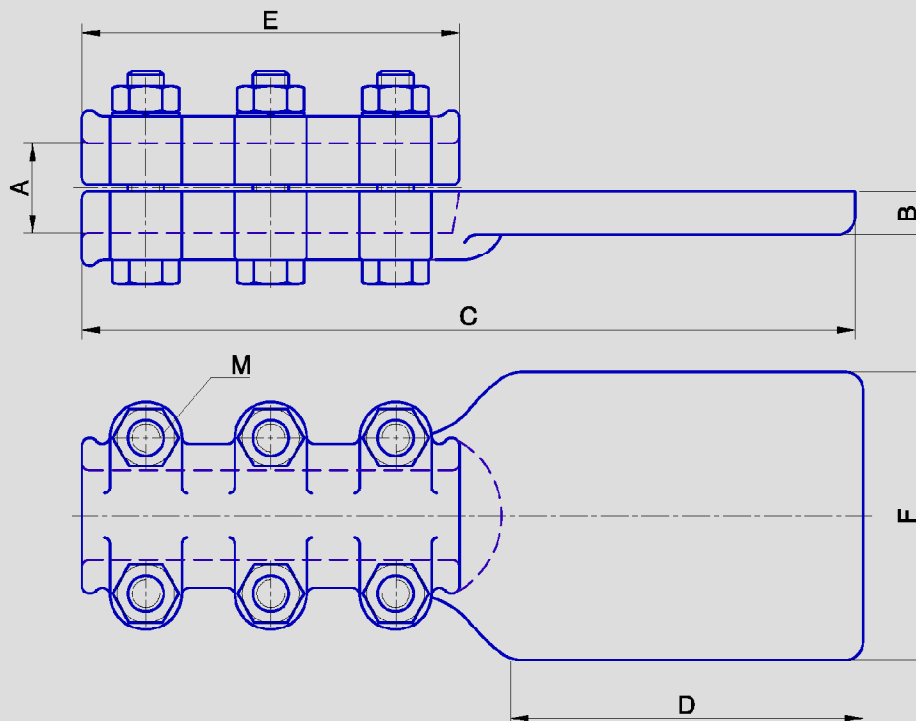

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter		Dimenzije - Dimensions						Težina Weight
	A (mm)		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M (mm)	
A21 18 70	17 – 20		12	180	70	90	60	M10	1,300
A21 22 70	20 – 23		12	195	70	105	70	M10	1,400
A21 22 80	20 – 23		12	205	80	105	70	M10	1,500
A21 25 80	23 – 26		12	205	80	105	80	M10	1,600
A21 25 90	23 – 26		12	215	90	105	80	M10	1,700
A21 27 90	26 – 29		15	230	90	120	90	M12	1,800
A21 27 100	26 – 29		15	240	100	120	90	M12	1,900
A21 30 100	29 – 32		15	255	100	135	100	M12	2,000
A21 30 110	29 – 32		18	265	110	135	100	M12	2,150

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

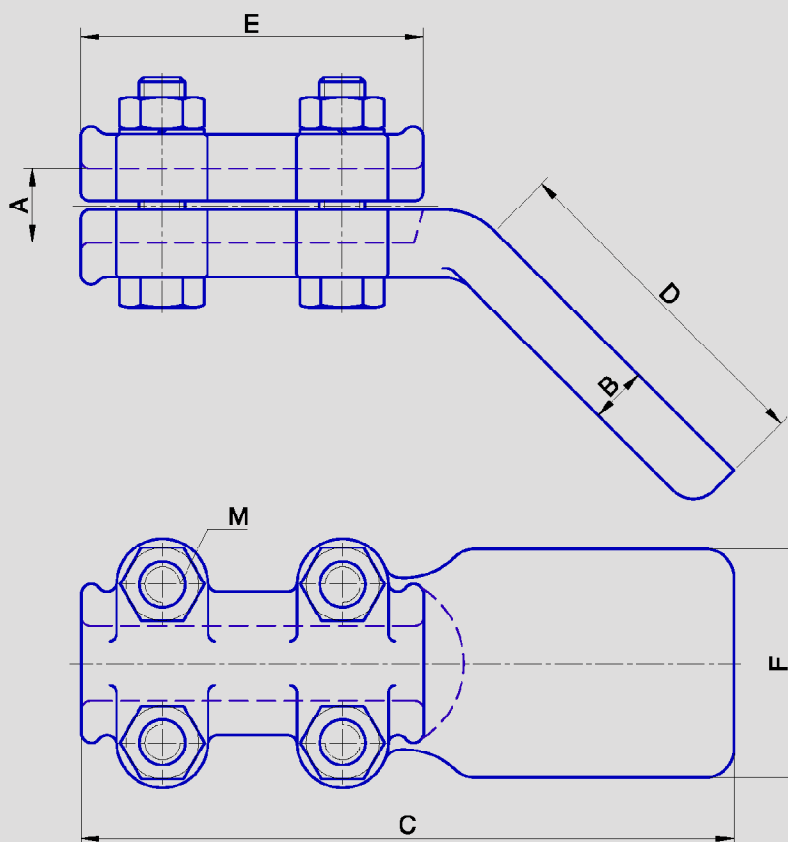

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter A (mm)	Dimenzije - Dimensions						Težina Weight (≈kg)
		B	C	D	E	F	M	
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
A22 6 30	5 – 8	8	80	30	40	25	M6	0,200
A22 10 30	8 – 11	8	90	30	50	30	M6	0,250
A22 10 40	8 – 11	8	95	40	50	30	M6	0,300
A22 12 40	11 – 14	10	105	40	60	40	M8	0,380
A22 12 50	11 – 14	10	115	50	60	40	M8	0,450
A22 15 50	14 – 17	10	125	50	70	50	M10	0,550
A22 15 60	14 – 17	10	130	60	70	50	M10	0,650
A22 18 60	17 – 20	10	140	60	80	60	M10	0,800

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.



Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

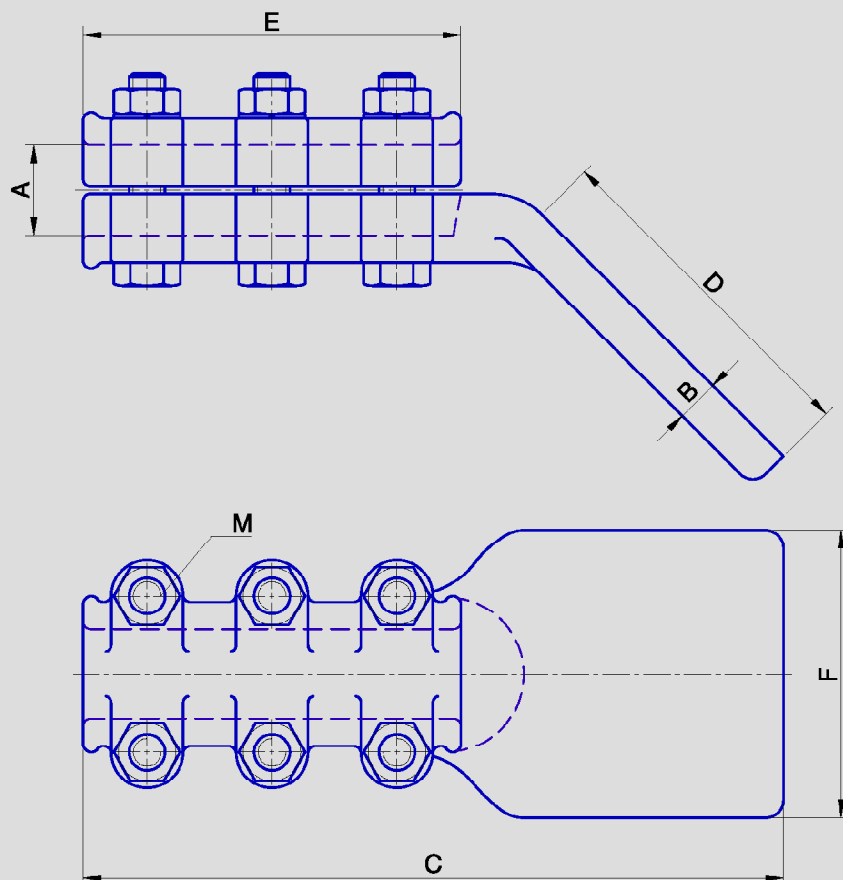

Kataloški broj <i>Catalogue No.</i>	Prečnik provodnika <i>Conductor diameter</i>	Dimenzije - <i>Dimensions</i>							Težina <i>Weight</i>
			B	C	D	E	F	M	
		A (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
A22 18 70	17 – 20	12	160	70	90	60	M10	1,300	
A22 22 70	20 – 23	12	170	70	105	70	M10	1,400	
A22 22 80	20 – 23	12	180	80	105	70	M10	1,500	
A22 25 80	23 – 26	12	180	80	105	80	M10	1,600	
A22 25 90	23 – 26	12	190	90	105	80	M10	1,700	
A22 27 90	26 – 29	15	210	90	120	90	M12	1,800	
A22 27 100	26 – 29	15	215	100	120	90	M12	1,900	
A22 30 100	29 – 32	15	230	100	135	100	M12	2,000	
A22 30 110	29 – 32	18	235	110	135	100	M12	2,150	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

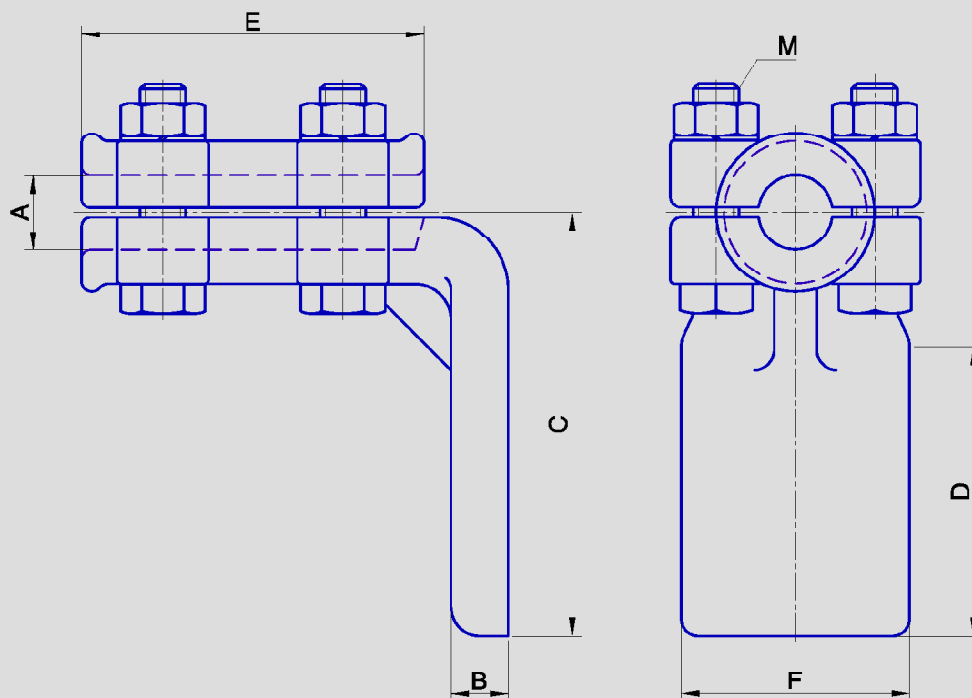

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter A (mm)	Dimenzije - Dimensions						Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M (mm)	
A23 6 30	5 – 8	8	60	30	40	25	M6	0,230
A23 10 30	8 – 11	8	60	30	50	30	M6	0,280
A23 10 40	8 – 11	8	70	40	50	30	M6	0,330
A23 12 40	11 – 14	10	70	40	60	40	M8	0,400
A23 12 50	11 – 14	10	80	50	60	40	M8	0,480
A23 15 50	14 – 17	10	80	50	70	50	M10	0,580
A23 15 60	14 – 17	10	90	60	70	50	M10	0,700
A23 18 60	17 – 20	10	90	60	80	60	M10	0,830

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

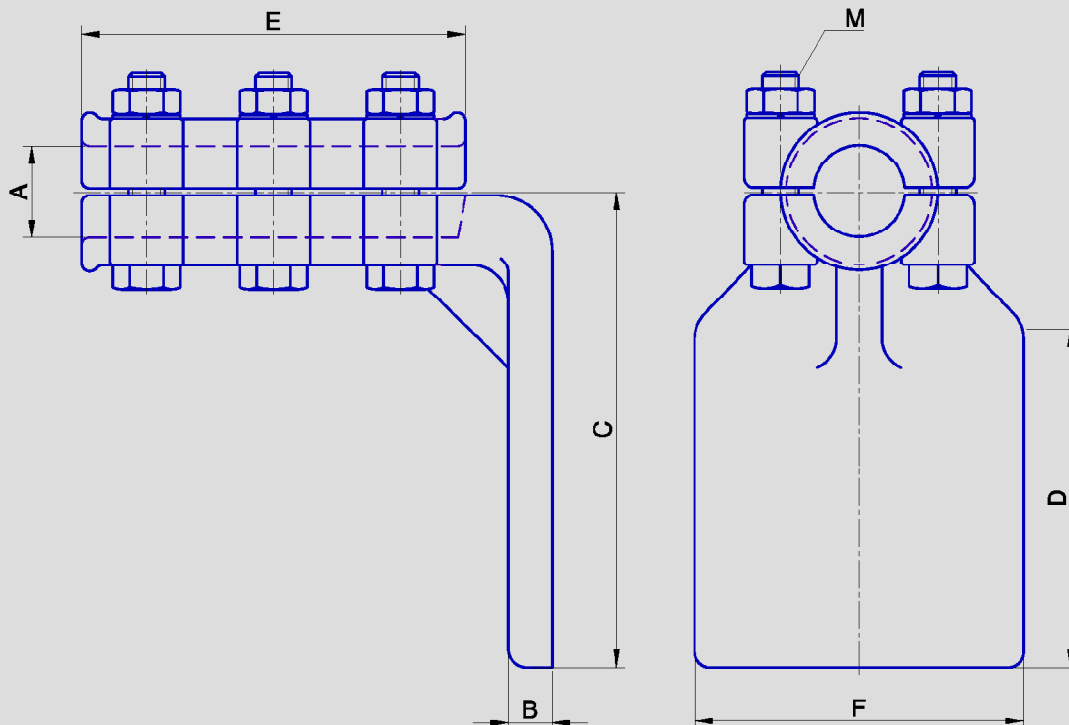

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter		Dimenzije - Dimensions						Težina Weight
	A (mm)		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M (mm)	
A23 18 70	17 – 20		12	110	70	90	60	M10	1,350
A23 22 70	20 – 23		12	110	70	105	70	M10	1,450
A23 22 80	20 – 23		12	120	80	105	70	M10	1,550
A23 25 80	23 – 26		12	120	80	105	80	M10	1,650
A23 25 90	23 – 26		12	130	90	105	80	M10	1,750
A23 27 90	26 – 29		15	130	90	120	90	M12	1,860
A23 27 100	26 – 29		15	140	100	120	90	M12	1,960
A23 30 100	29 – 32		15	140	100	135	100	M12	2,080
A23 30 110	29 – 32		18	150	110	135	110	M12	2,220

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

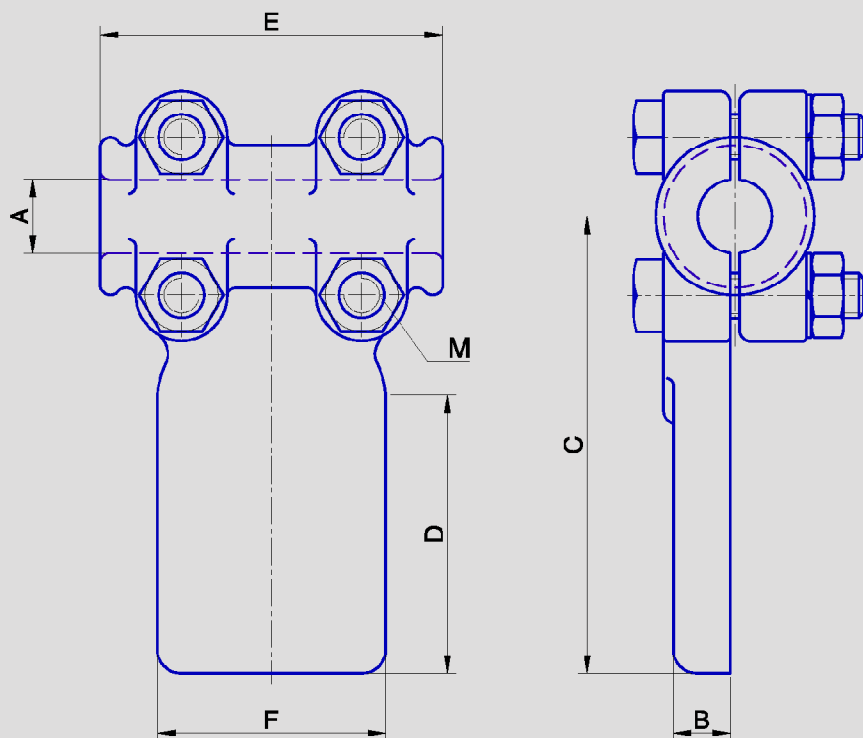

Kataloški broj <i>Catalogue No.</i>	Prečnik provodnika <i>Conductor diameter</i>	Dimenzije - <i>Dimensions</i>						Težina <i>Weight</i>	
			B	C	D	E	F		M
		A (mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
A24 6 30	5 – 8	8	60	30	40	25	M6	0,200	
A24 10 30	8 – 11	8	60	30	50	30	M6	0,250	
A24 10 40	8 – 11	8	70	40	50	30	M6	0,300	
A24 12 40	11 – 14	10	70	40	60	40	M8	0,380	
A24 12 50	11 – 14	10	80	50	60	40	M8	0,450	
A24 15 50	14 – 17	10	80	50	70	50	M10	0,550	
A24 15 60	14 – 17	10	90	60	70	50	M10	0,650	
A24 18 60	17 – 20	10	90	60	80	60	M10	0,800	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

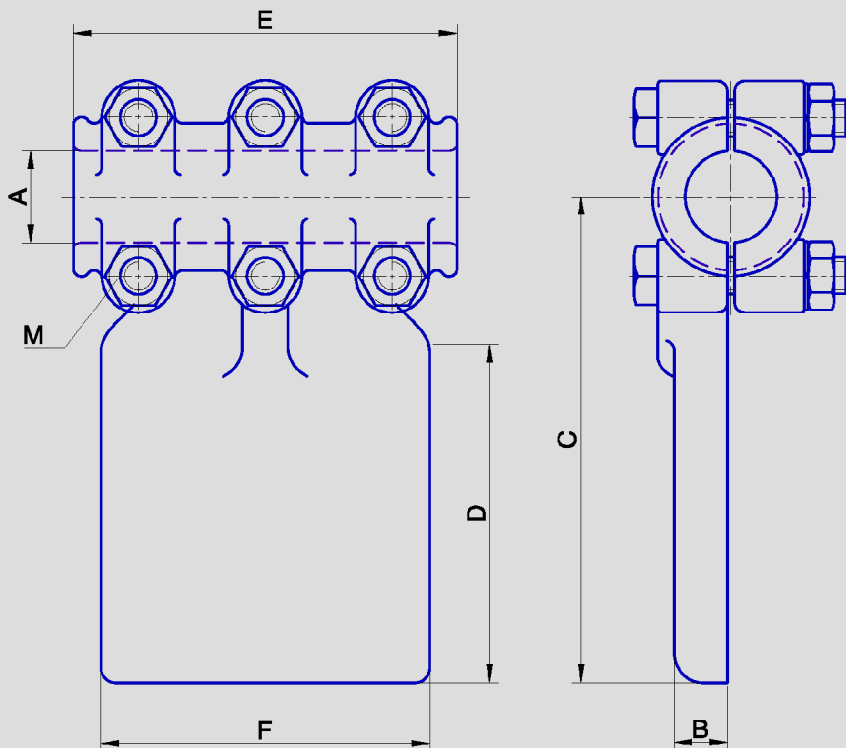

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter		Dimenzije - Dimensions						Težina Weight
	A (mm)		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M (mm)	
A23 18 70	17 – 20		12	110	70	90	60	M10	1,350
A23 22 70	20 – 23		12	110	70	105	70	M10	1,450
A23 22 80	20 – 23		12	120	80	105	70	M10	1,550
A23 25 80	23 – 26		12	120	80	105	80	M10	1,650
A23 25 90	23 – 26		12	130	90	105	80	M10	1,750
A23 27 90	26 – 29		15	130	90	120	90	M12	1,860
A23 27 100	26 – 29		15	140	100	120	90	M12	1,960
A23 30 100	29 – 32		15	140	100	135	100	M12	2,080
A23 30 110	29 – 32		18	150	110	135	110	M12	2,220

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.

Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.