


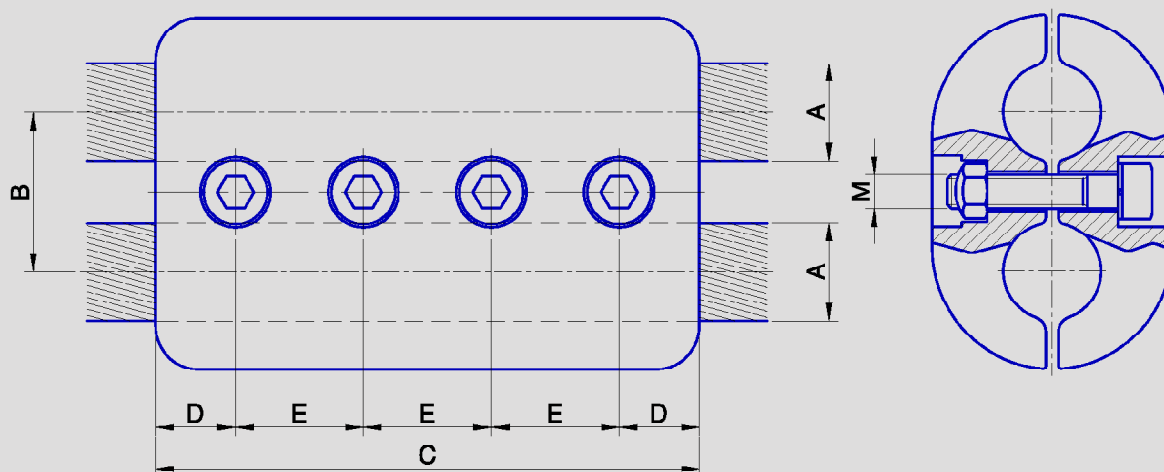

Kataloški broj Catalogue No.	Prečnik provodnika Conductor Diameter	Dimenzije - Dimensions					Težina Weight
		B	C	D	E	M	
	A (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM00 25 25	23 – 26	44	140	17,5	35	M12	1,800
AM00 27 27	26 – 29	47	155	20,5	38	M12	2,000
AM00 30 30	29 – 32	50	170	25	40	M12	2,700

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.



Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor for which the connector is to be applied to.

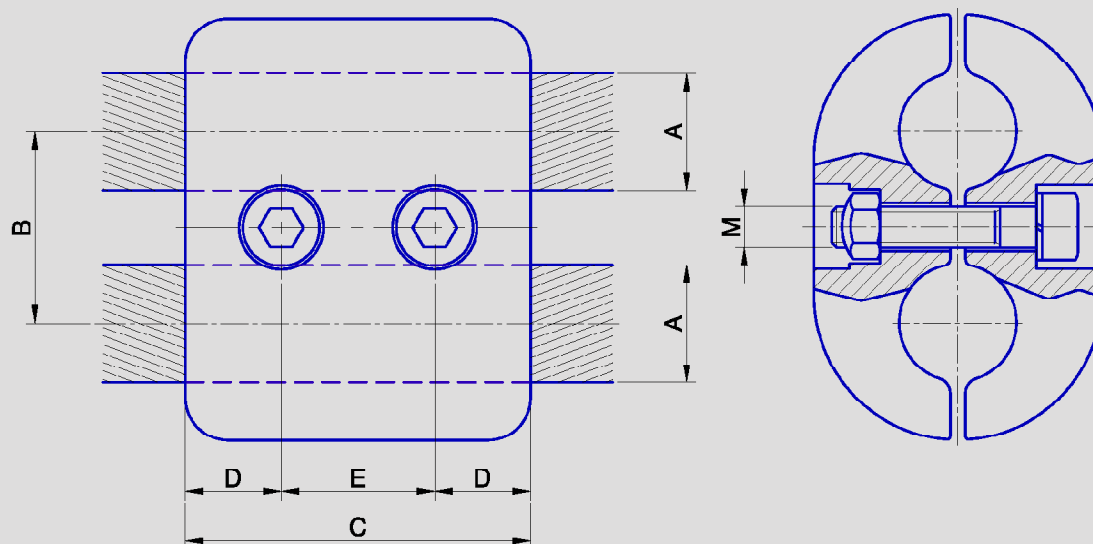

Kataloški broj Catalogue No.	Prečnik provodnika Conductor Diameter A (mm)	Dimenzije - Dimensions					Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	M (mm)	
AM00 25 25 05	23 – 26	44	70	17,5	35	M12	0,900
AM00 27 27 05	26 – 29	47	80	20	40	M12	1,000
AM00 30 30 05	29 – 32	50	90	22,5	45	M12	1,350

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor for which the connector is to be applied to.

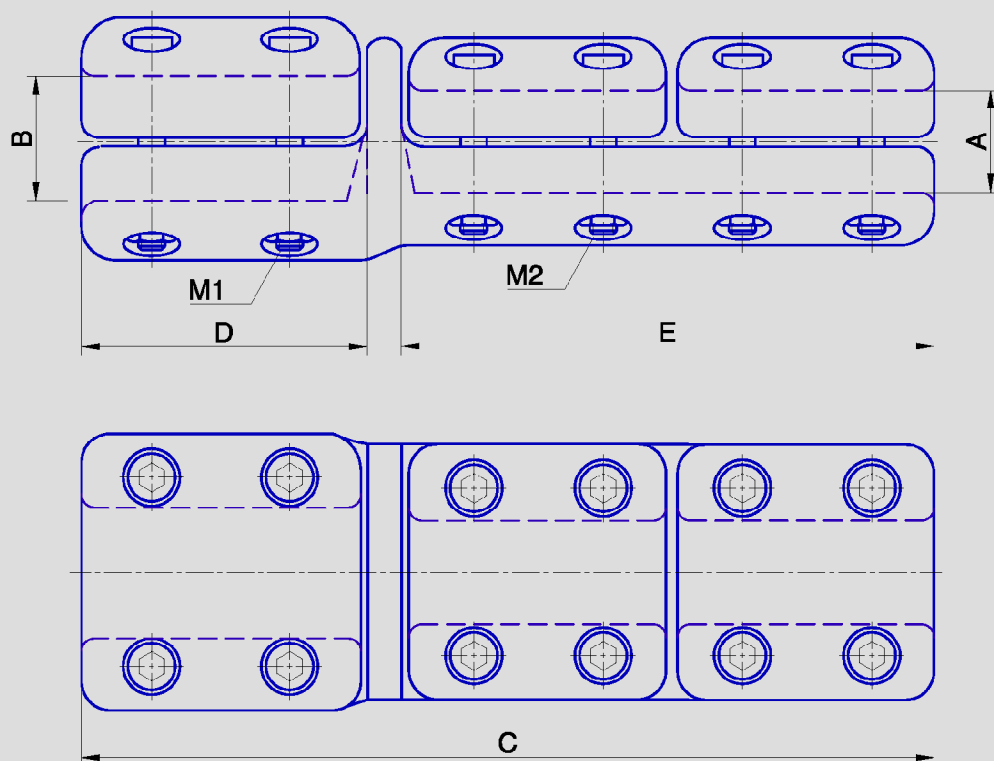

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>					Težina <i>Weight</i>
	Provodnik	Bolcn ili cev	C	D	E	M1	M2	
	<i>Conductor</i>	<i>Rivet or tube</i>						
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM11 25 30	23 – 26	20 – 30	310	100	190	M12	M12	4,200
AM11 25 40	23 – 26	30 – 40	315	105	190	M12	M12	4,700
AM11 27 30	26 – 29	20 – 30	310	100	190	M12	M12	4,400
AM11 27 40	26 – 29	30 – 40	315	105	190	M12	M12	4,850
AM11 30 30	29 – 32	20 – 30	310	100	190	M12	M12	4,500
AM11 30 40	29 – 32	30 – 40	315	105	190	M12	M12	5,000
AM11 30 50	29 – 32	40 – 50	320	110	190	M12	M12	5,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

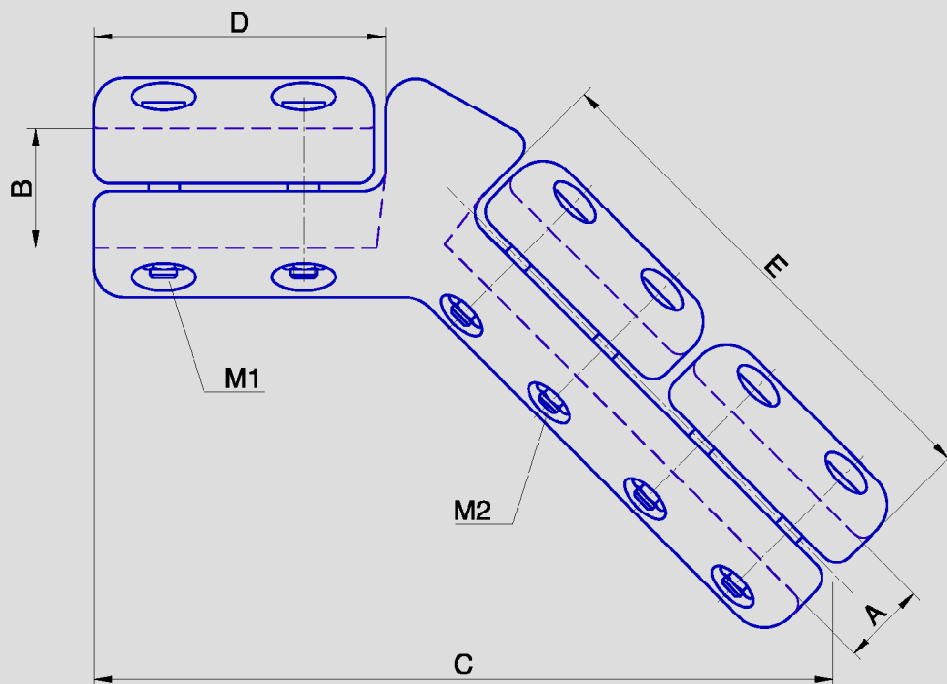

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Bolcn ili cev Rivet or tube B (mm)	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
AM12 25 30	23 – 26	20 – 30	265	100	190	M12	M12	4,500
AM12 25 40	23 – 26	30 – 40	270	105	190	M12	M12	5,000
AM12 27 30	26 – 29	20 – 30	265	100	190	M12	M12	4,750
AM12 27 40	26 – 29	30 – 40	270	105	190	M12	M12	5,200
AM12 30 30	29 – 32	20 – 30	265	100	190	M12	M12	5,000
AM12 30 40	29 – 32	30 – 40	270	105	190	M12	M12	5,300
AM12 30 50	29 – 32	40 – 50	275	110	190	M12	M12	5,750

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

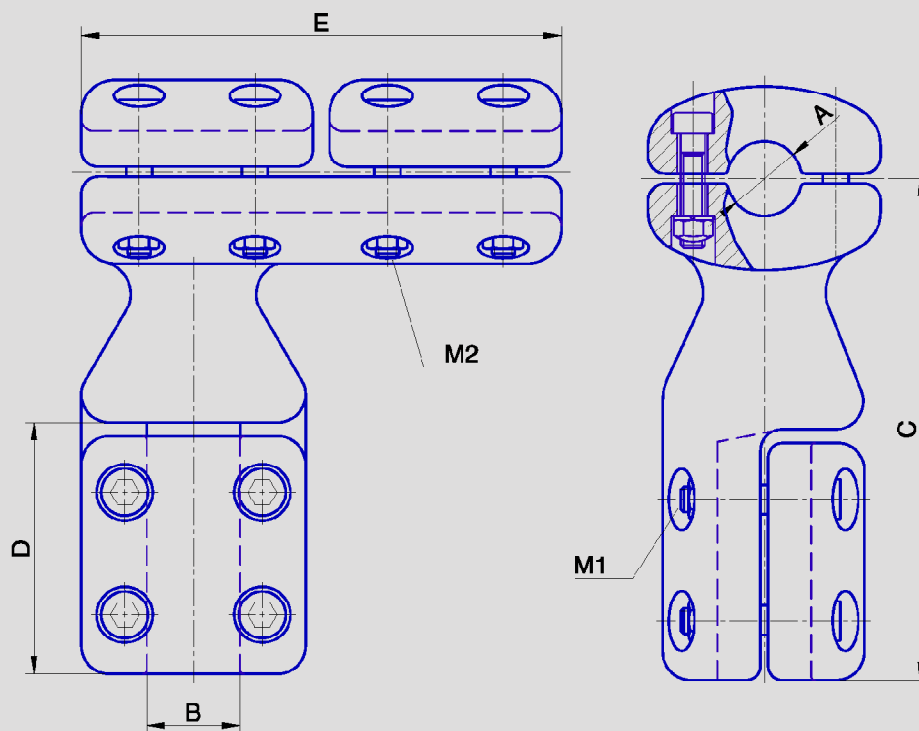

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Bolcn ili cev Rivet or tube B (mm)	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
AM13 25 30	23 – 26	20 – 30	200	100	190	M12	M12	4,000
AM13 25 40	23 – 26	30 – 40	205	105	190	M12	M12	4,500
AM13 27 30	26 – 29	20 – 30	200	100	190	M12	M12	4,650
AM13 27 40	26 – 29	30 – 40	205	105	190	M12	M12	5,150
AM13 30 30	29 – 32	20 – 30	200	100	190	M12	M12	5,200
AM13 30 40	29 – 32	30 – 40	205	105	190	M12	M12	5,700
AM13 30 50	29 – 32	40 – 50	210	110	190	M12	M12	6,200

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

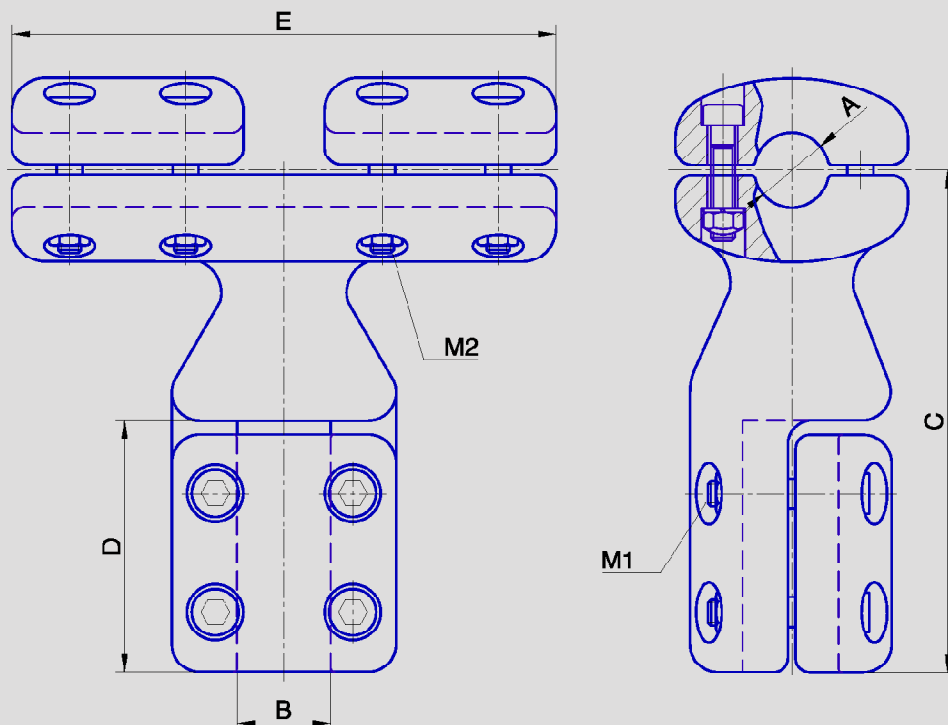

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM14 18 30	17 – 20	20 – 30	200	100	170	M12	M10	3,100
AM14 18 40	17 – 20	30 – 40	205	105	170	M12	M10	3,400
AM14 22 30	20 – 23	20 – 30	200	100	170	M12	M10	3,500
AM14 22 40	20 – 23	30 – 40	205	105	170	M12	M10	3,900
AM14 25 30	23 – 26	20 – 30	200	100	200	M12	M12	4,000
AM14 25 40	23 – 26	30 – 40	205	105	200	M12	M12	4,500
AM14 27 30	26 – 29	20 – 30	200	100	200	M12	M12	4,650
AM14 27 40	26 – 29	30 – 40	205	105	200	M12	M12	5,150
AM14 30 30	29 – 32	20 – 30	200	100	200	M12	M12	5,200
AM14 30 40	29 – 32	30 – 40	205	105	200	M12	M12	5,700
AM14 30 50	29 – 32	40 – 50	210	110	200	M12	M12	6,200

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

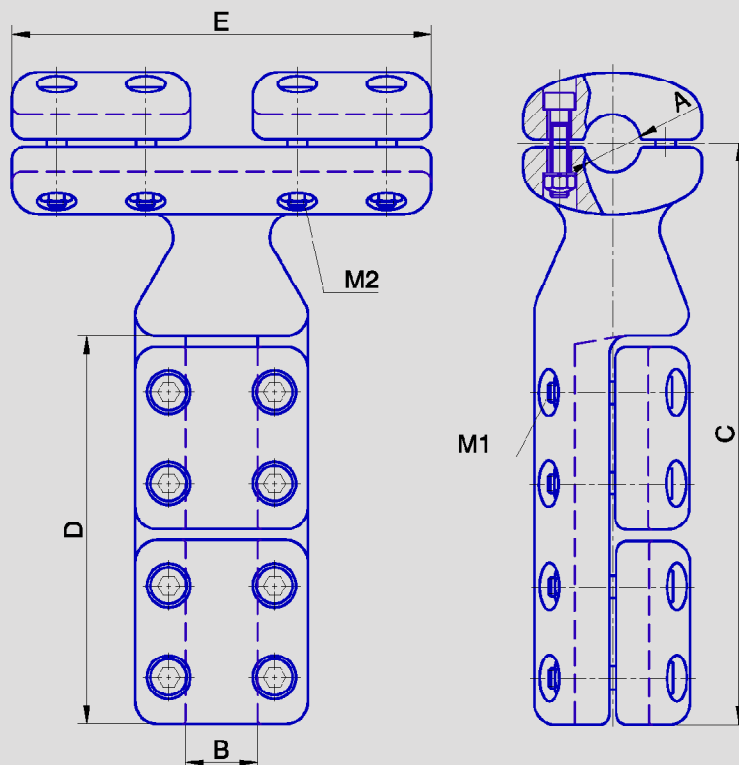

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight (≈kg)
	Provodnik Conductor A (mm)	Provodnik Conductor B (mm)	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)	
AM04 22 22	20 – 23	20 – 23	270	155	170	M10	M10	3,800
AM04 25 22	23 – 26	20 – 23	270	155	200	M12	M12	4,000
AM04 25 25	23 – 26	23 – 26	290	175	200	M12	M12	4,300
AM04 27 22	26 – 29	20 – 23	270	155	220	M12	M12	4,400
AM04 27 25	26 – 29	23 – 26	290	175	220	M12	M12	4,800
AM04 27 27	26 – 29	26 – 29	310	195	220	M12	M12	5,400
AM04 30 22	29 – 32	20 – 23	270	155	220	M12	M12	5,500
AM04 30 25	29 – 32	23 – 26	290	175	220	M12	M12	5,800
AM04 30 27	29 – 32	26 – 29	310	195	220	M12	M12	6,100
AM04 30 30	29 – 32	29 – 32	315	200	220	M12	M12	6,400

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

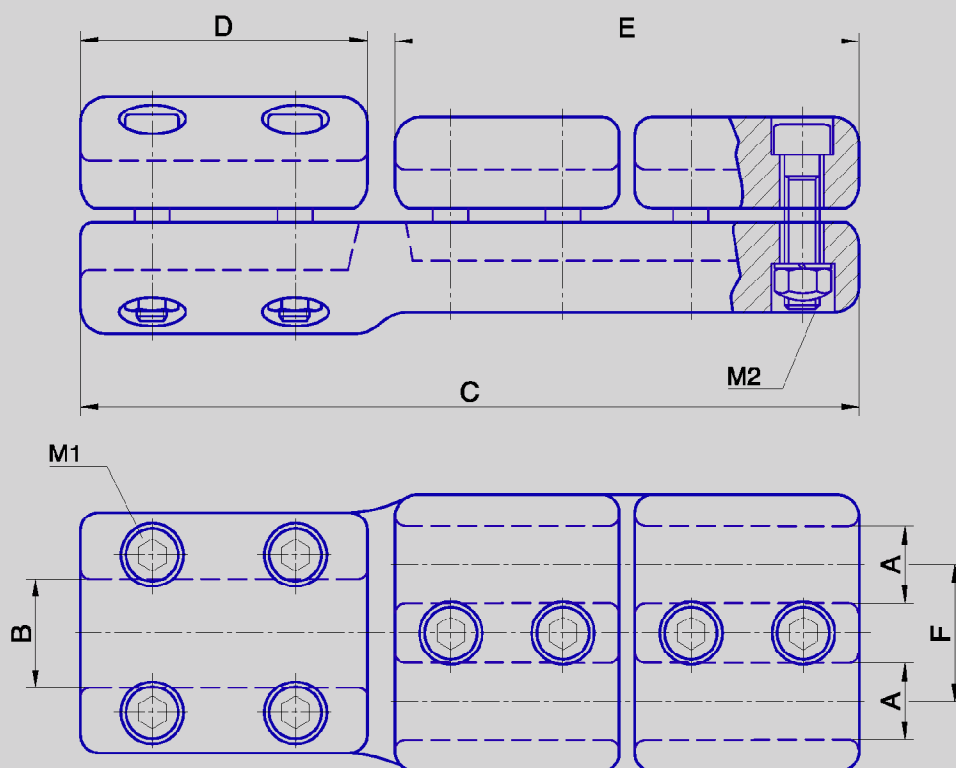

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	D	E	F	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM112 25 30 50	23 – 26	20 – 30	270	100	160	50	M12	M12	4,100
AM112 25 40 50	23 – 26	30 – 40	275	105	160	50	M12	M12	4,600
AM112 27 30 50	26 – 29	20 – 30	280	100	170	50	M12	M12	4,300
AM112 27 40 50	26 – 29	30 – 40	285	105	170	50	M12	M12	4,700
AM112 30 30 50	29 – 32	20 – 30	290	100	180	50	M12	M12	4,400
AM112 30 40 50	29 – 32	30 – 40	295	105	180	50	M12	M12	4,850
AM112 30 50 50	29 – 32	40 – 50	300	110	180	50	M12	M12	5,300

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

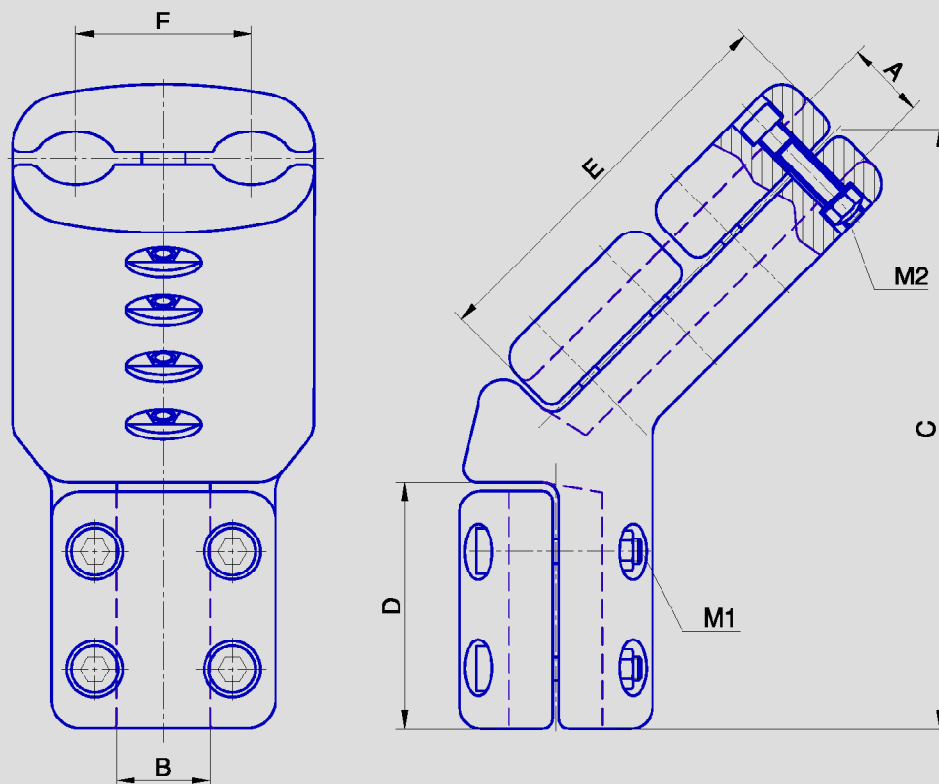

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>							Težina <i>Weight</i> (≈kg)
	Provodnik <i>Conductor</i>	Bolcn ili cev <i>Rivet or tube</i>	C	D	E	F	M1	M2		
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
AM122 25 30 50	23 – 26	20 – 30	200	100	160	50	M12	M12	4,200	
AM122 25 40 50	23 – 26	30 – 40	205	105	160	50	M12	M12	4,700	
AM122 27 30 50	26 – 29	20 – 30	200	100	170	50	M12	M12	4,400	
AM122 27 40 50	26 – 29	30 – 40	205	105	170	50	M12	M12	4,800	
AM122 30 30 50	29 – 32	20 – 30	200	100	180	50	M12	M12	4,500	
AM122 30 40 50	29 – 32	30 – 40	205	105	180	50	M12	M12	5,000	
AM122 30 50 50	29 – 32	40 – 50	210	110	180	50	M12	M12	5.400	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

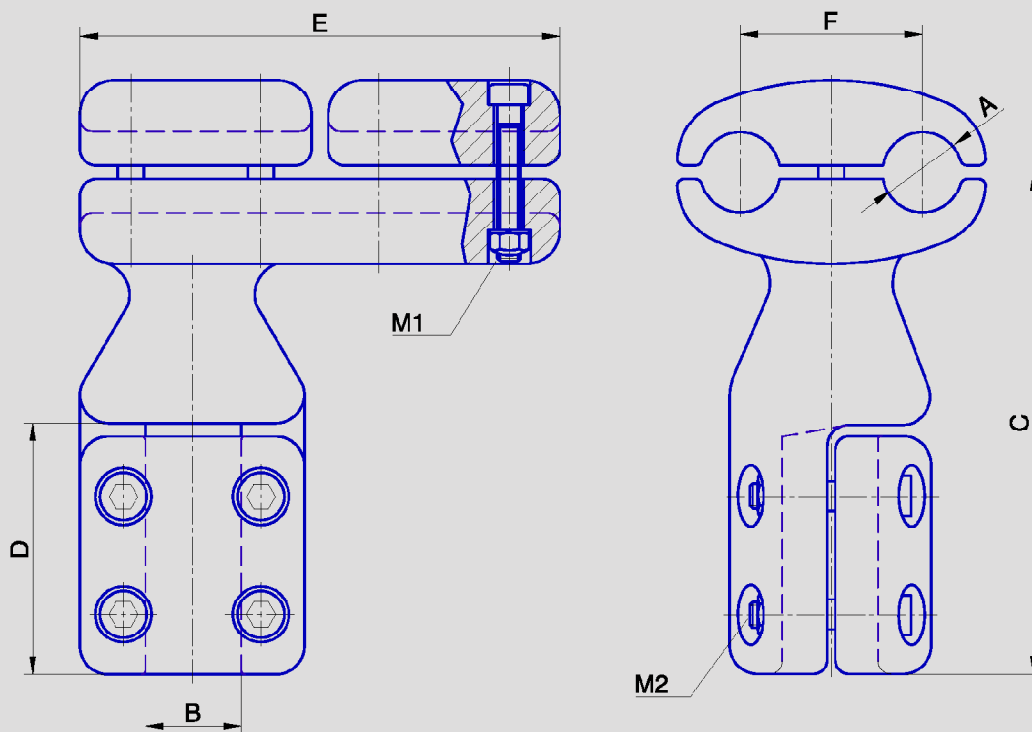

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	D	E	F	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM132 25 30 50	23 – 26	20 – 30	200	100	160	50	M12	M12	4,200
AM132 25 40 50	23 – 26	30 – 40	205	105	160	50	M12	M12	4,700
AM132 27 30 50	26 – 29	20 – 30	200	100	170	50	M12	M12	4,400
AM132 27 40 50	26 – 29	30 – 40	205	105	170	50	M12	M12	4,800
AM132 30 30 50	29 – 32	20 – 30	200	100	180	50	M12	M12	4,500
AM132 30 40 50	29 – 32	30 – 40	205	105	180	50	M12	M12	5,000
AM132 30 50 50	29 – 32	40 – 50	210	110	180	50	M12	M12	5,400

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

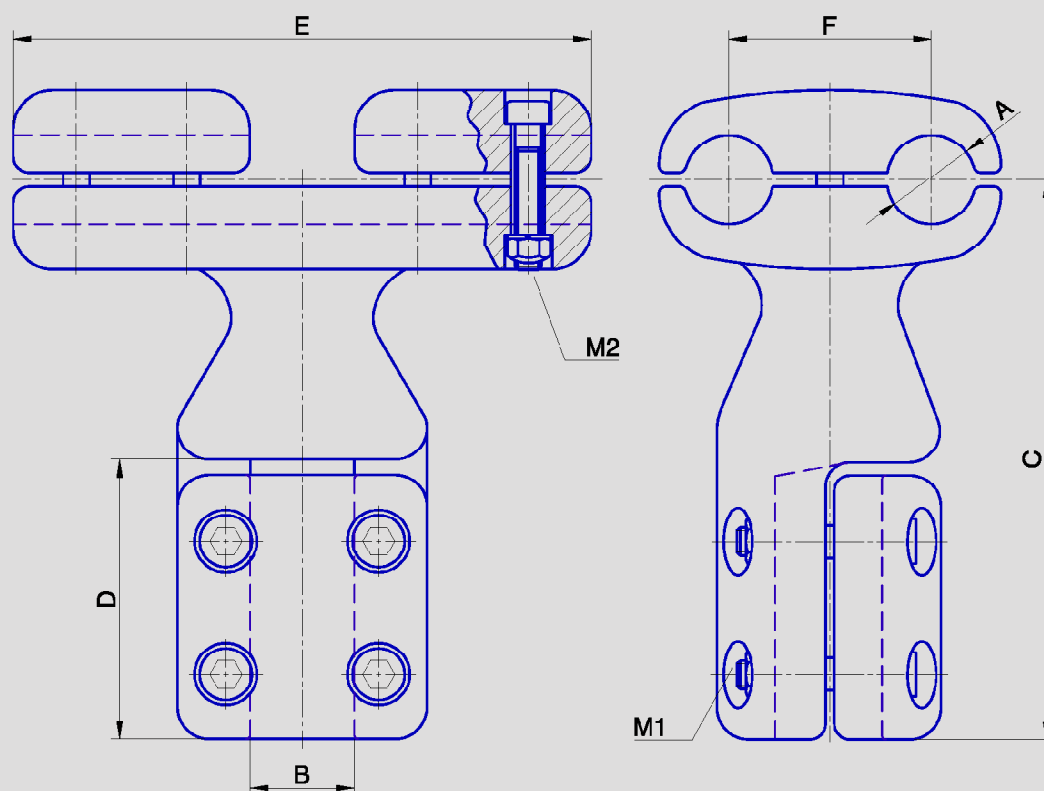

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor	Boln ili cev Rivet or tube	C	D	E	F	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM142 25 30 50	23 – 26	20 – 30	200	100	200	50	M12	M12	4,300
AM142 25 40 50	23 – 26	30 – 40	205	105	200	50	M12	M12	4,850
AM142 27 30 50	26 – 29	20 – 30	200	100	220	50	M12	M12	4,800
AM142 27 40 50	26 – 29	30 – 40	205	105	220	50	M12	M12	5,300
AM142 30 30 50	29 – 32	20 – 30	200	100	220	50	M12	M12	5,200
AM142 30 40 50	29 – 32	30 – 40	205	105	220	50	M12	M12	5,900
AM142 30 50 50	29 – 32	40 – 50	210	110	220	50	M12	M12	6,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn boln ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

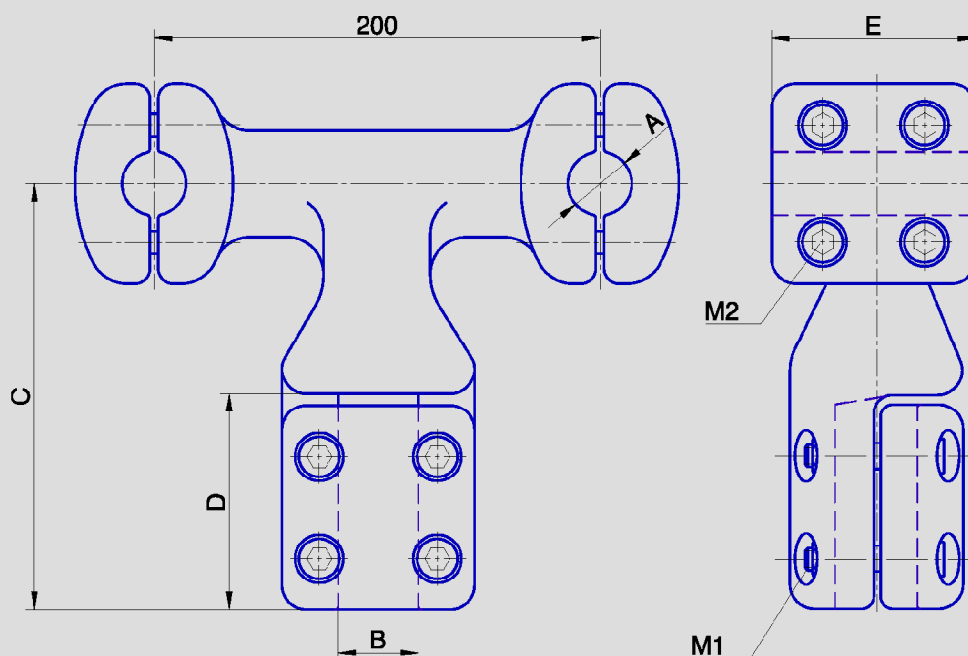

Kataloški broj Catalogue No.	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>					Težina <i>Weight</i> (≈kg)
	Provodnik <i>Conductor</i>	Bolcn ili cev <i>Rivet or tube</i>	C	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
AM142 25 30 200	23 – 26	20 – 30	200	100	90	M12	M12	5,000
AM142 25 40 200	23 – 26	30 – 40	205	105	90	M12	M12	5,200
AM142 27 30 200	26 – 29	20 – 30	200	100	90	M12	M12	5,600
AM142 27 40 200	26 – 29	30 – 40	205	105	90	M12	M12	5,800
AM142 30 30 200	29 – 32	20 – 30	200	100	100	M12	M12	6,200
AM142 30 40 200	29 – 32	30 – 40	205	105	100	M12	M12	6,400
AM142 30 50 200	29 – 32	40 – 50	210	110	100	M12	M12	6,600

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.



Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

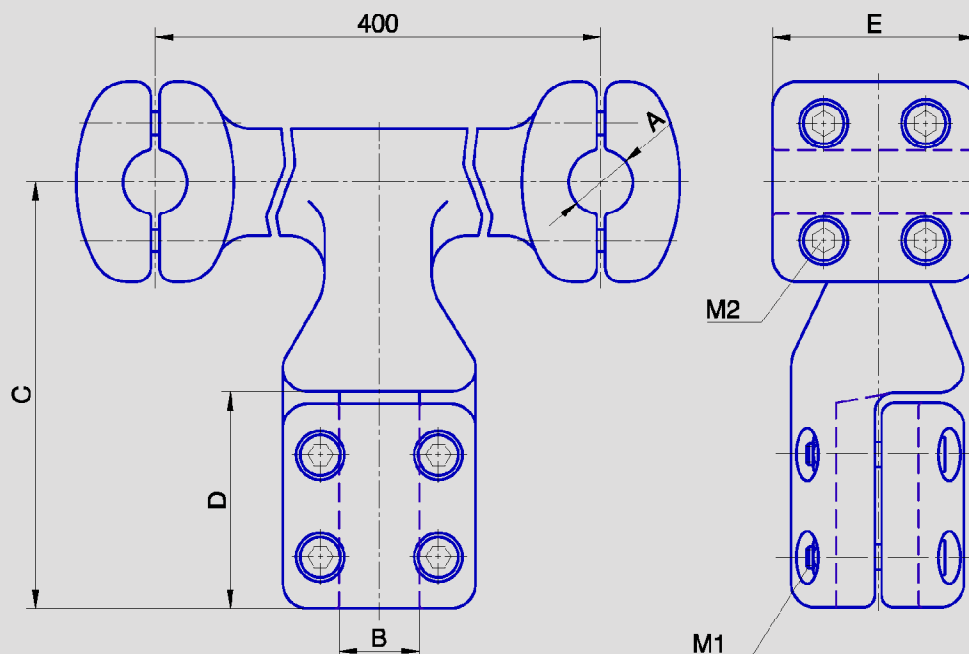

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>					Težina <i>Weight</i>
	Provodnik <i>Conductor</i>	Bolcn ili cev <i>Rivet or tube</i>	C	D	E	F	M	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
AM142 25 30 400	23 – 26	20 – 30	200	100	90	M12	M12	5,500
AM142 25 40 400	23 – 26	30 – 40	205	105	90	M12	M12	5,700
AM142 27 30 400	26 – 29	20 – 30	200	100	90	M12	M12	5,800
AM142 27 40 400	26 – 29	30 – 40	205	105	90	M12	M12	6,100
AM142 30 30 400	29 – 32	20 – 30	200	100	100	M12	M12	6,600
AM142 30 40 400	29 – 32	30 – 40	205	105	100	M12	M12	7,000
AM142 30 50 400	29 – 32	40 – 50	210	110	100	M12	M12	7,400

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

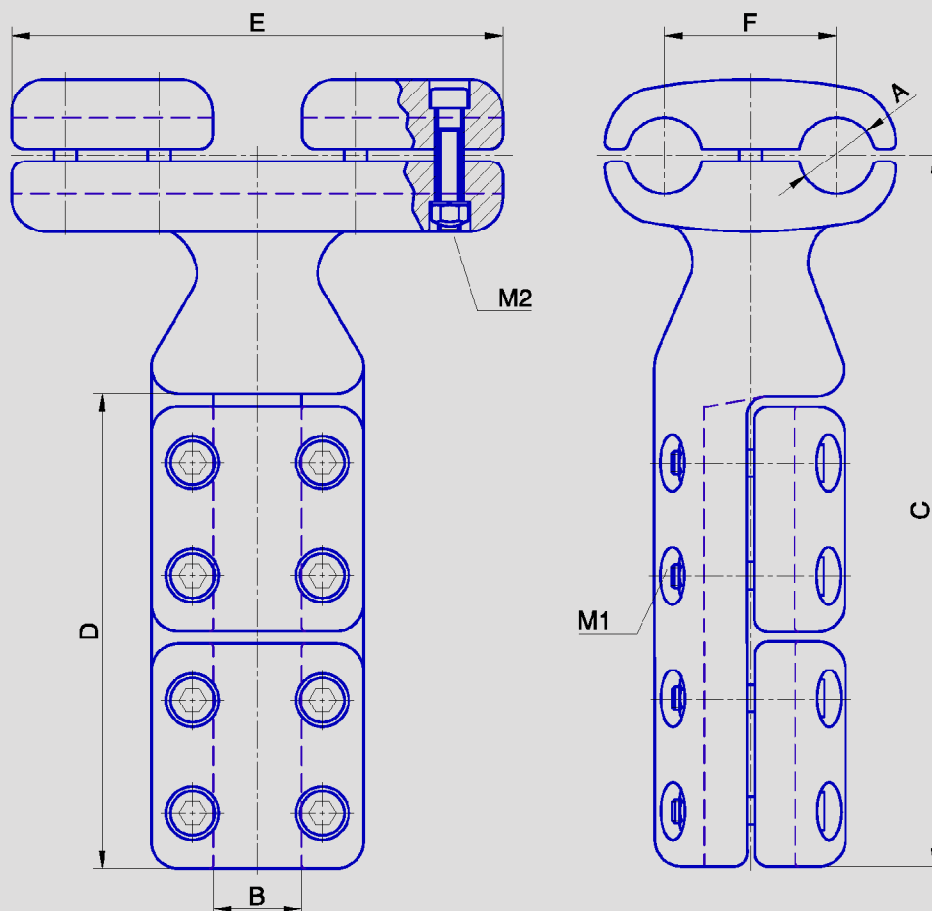

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor A (mm)	Provodnik Conductor B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M1 (mm)	M2 (mm)	
AM042 25 25 50	23 - 26	23 - 26	290	175	160	50	M12	M12	6,200
AM042 27 25 50	26 - 29	23 - 26	290	175	160	50	M12	M12	6,600
AM042 27 27 50	26 - 29	26 - 29	310	195	170	50	M12	M12	7,000
AM042 30 25 50	29 - 32	23 - 26	290	175	170	50	M12	M12	7,400
AM042 30 27 50	29 - 32	26 - 29	310	195	180	50	M12	M12	7,800
AM042 30 30 50	29 - 32	29 - 32	315	200	180	50	M12	M12	8,200

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

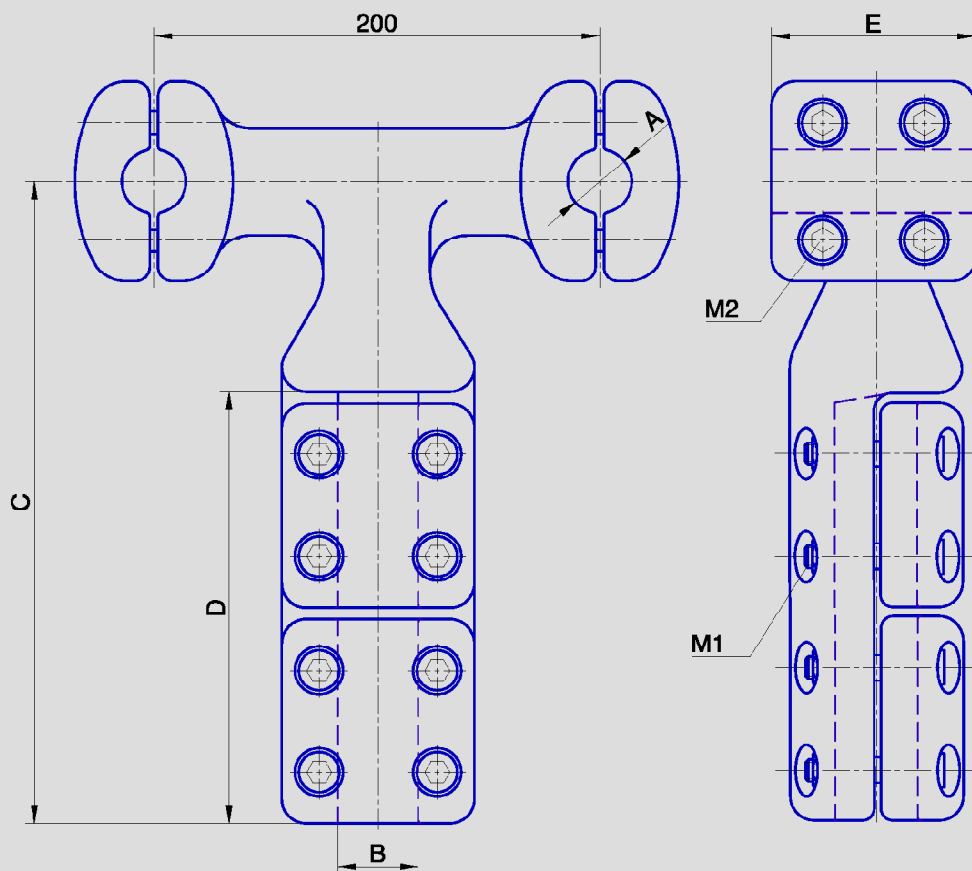

Kataloški broj Catalogue No.	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>						Težina Weight (≈kg)
	Provodnik Conductor	Provodnik Conductor	C (mm)	D (mm)	E (mm)	M1 (mm)	M2 (mm)		
	A (mm)	B (mm)							
AM042 25 25 200	23 – 26	23 – 26	290	175	90	M12	M12	6,275	
AM042 27 25 200	26 – 29	23 – 26	290	175	90	M12	M12	6,800	
AM042 27 27 200	26 – 29	26 – 29	310	195	90	M12	M12	7,150	
AM042 30 25 200	29 – 32	23 – 26	290	175	100	M12	M12	7,650	
AM042 30 27 200	29 – 32	26 – 29	310	195	100	M12	M12	7,925	
AM042 30 30 200	29 – 32	29 – 32	315	200	100	M12	M12	8,200	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

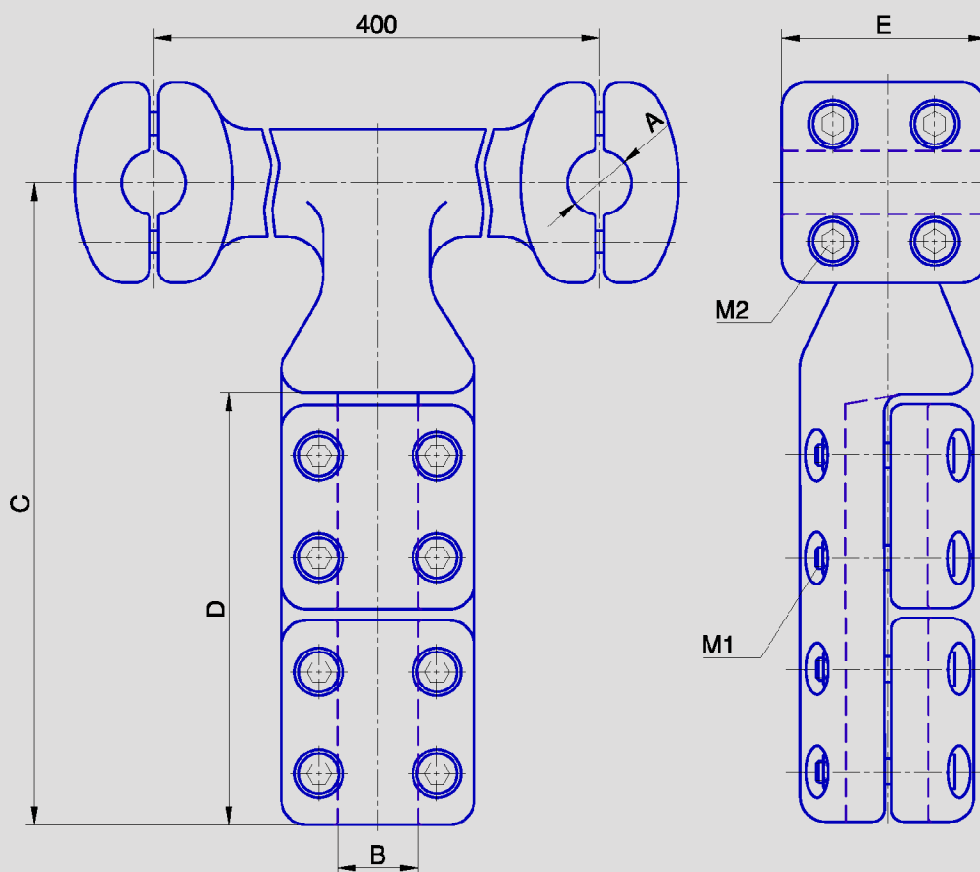

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Provodnik Conductor	C	D	E	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM042 25 25 400	23 – 26	23 – 26	290	175	90	M12	M12	6,775
AM042 27 25 400	26 – 29	23 – 26	290	175	90	M12	M12	7,000
AM042 27 27 400	26 – 29	26 – 29	310	195	90	M12	M12	7,450
AM042 30 25 400	29 – 32	23 – 26	290	175	100	M12	M12	8,050
AM042 30 27 400	29 – 32	26 – 29	310	195	100	M12	M12	8,525
AM042 30 30 400	29 – 32	29 – 32	315	200	100	M12	M12	9,000

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

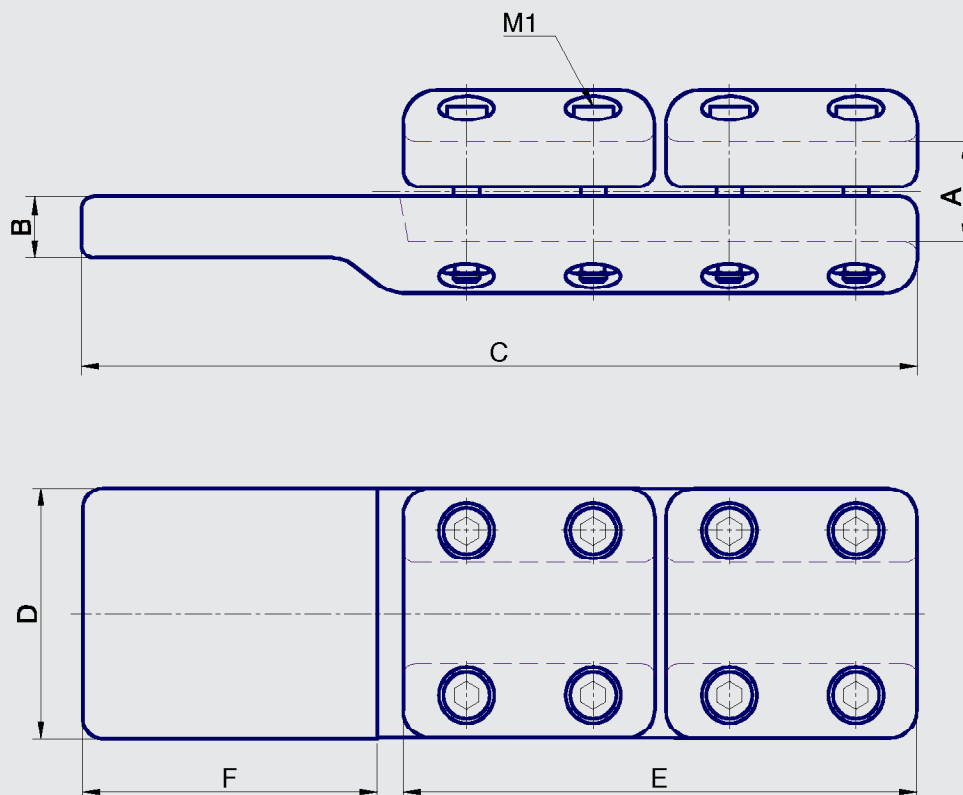

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor A (mm)	Dimenzije - Dimensions					M1	Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)		
AM21 22 110	23 – 26	15	310	110	190	110	M12	3,100
AM21 25 110	23 – 26	17	315	110	190	110	M12	3,200
AM21 25 150	26 – 29	17	310	150	190	110	M12	3,500
AM21 27 110	26 – 29	20	315	110	190	110	M12	3,600
AM21 27 150	29 – 32	20	310	150	190	110	M12	3,800
AM21 30 110	29 – 32	22	315	110	190	110	M12	3,900
AM21 30 150	29 – 32	22	320	150	190	110	M12	4,100

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

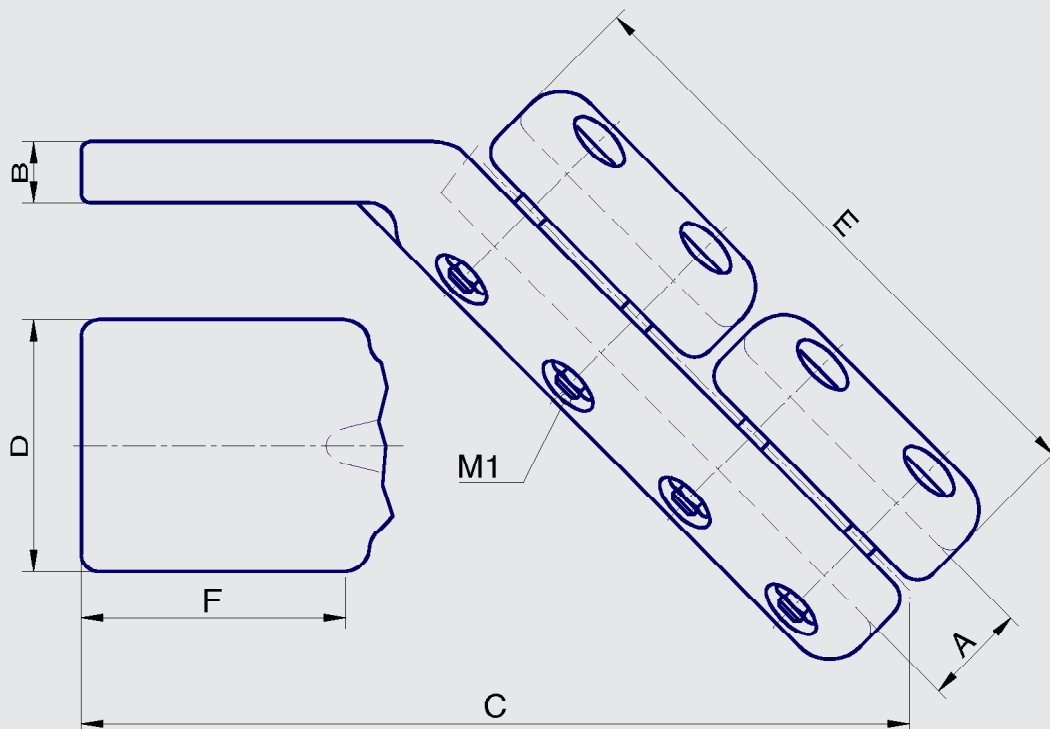

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor	Dimenzije - Dimensions						Težina Weight
	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M1 (mm)	
AM22 22 110	23 – 26	15	265	110	190	110	M12	3,100
AM22 25 110	23 – 26	17	270	110	190	110	M12	3,200
AM22 25 150	26 – 29	17	265	150	190	110	M12	3,500
AM22 27 110	26 – 29	20	270	110	190	110	M12	3,600
AM22 27 150	29 – 32	20	265	150	190	110	M12	3,800
AM22 30 110	29 – 32	22	270	110	190	110	M12	3,900
AM22 30 150	29 – 32	22	275	150	190	110	M12	4,100

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

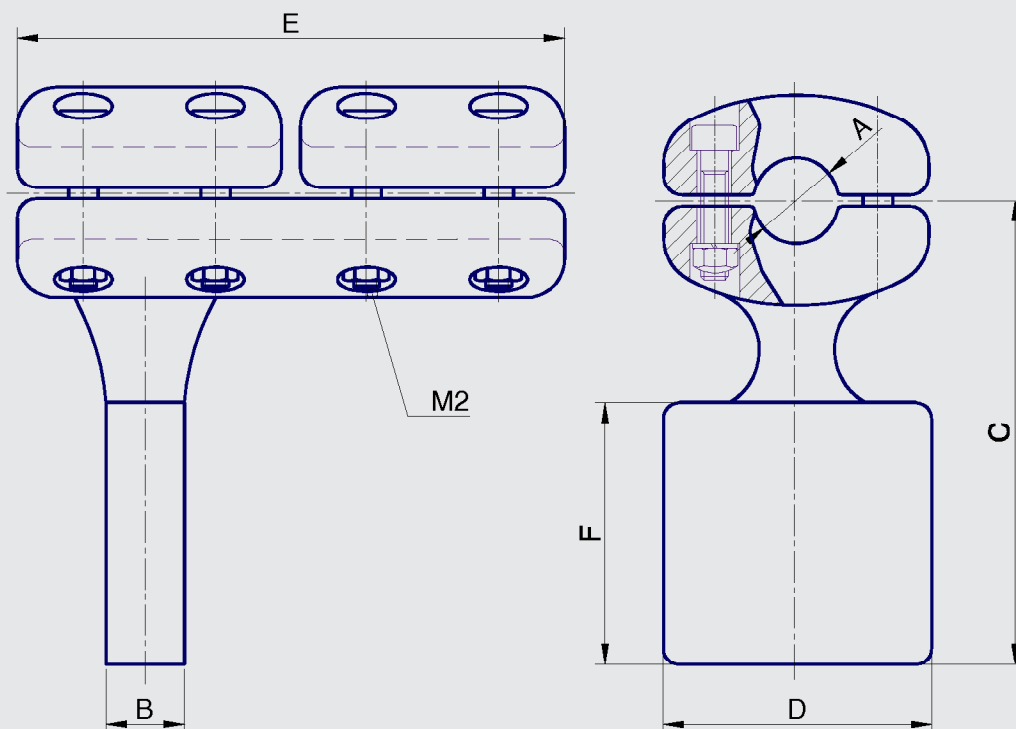

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor A (mm)	Dimenzije - Dimensions						Težina Weight (≈kg)
		B	C	D	E	F	M1	
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
AM23 22 110	23 – 26	15	200	110	190	110	M12	3,400
AM23 25 110	23 – 26	17	205	110	190	110	M12	3,500
AM23 25 150	26 – 29	17	200	150	190	110	M12	3,800
AM23 27 110	26 – 29	20	205	110	190	110	M12	3,900
AM23 27 150	29 – 32	20	200	150	190	110	M12	4,100
AM23 30 110	29 – 32	22	205	110	190	110	M12	4,200
AM23 30 150	29 – 32	22	210	150	190	110	M12	4,400

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

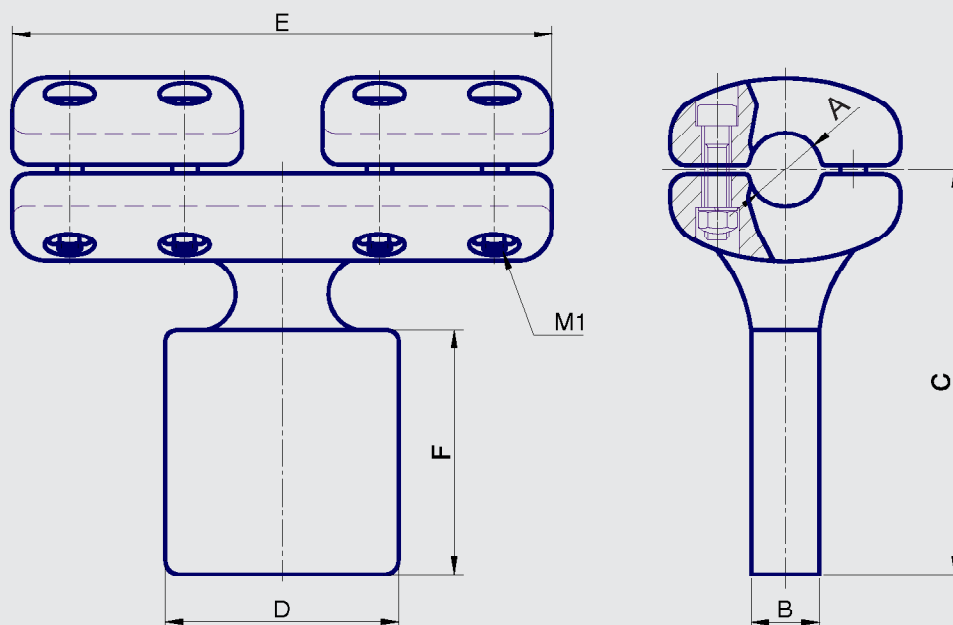

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor	Dimenzije - Dimensions						Težina Weight
		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	
AM24 18 110	23 – 26		15	200	110	170	110	M12 3,200
AM24 18 150	23 – 26		15	205	150	170	110	M12 3,400
AM24 22 110	26 – 29		17	200	110	170	110	M12 3,500
AM24 22 150	26 – 29		17	205	150	170	110	M12 3,700
AM24 25 110	29 – 32		17	200	110	200	110	M12 3,800
AM24 25 150	29 – 32		17	205	150	200	110	M12 3,900
AM24 27 110	29 – 32		20	200	110	200	110	M12 4,000
AM24 27 150	26 – 29		20	205	150	200	110	M12 4,200
AM24 30 110	29 – 32		22	200	110	200	110	M12 4,300
AM24 30 150	29 – 32		22	205	150	200	110	M12 4,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

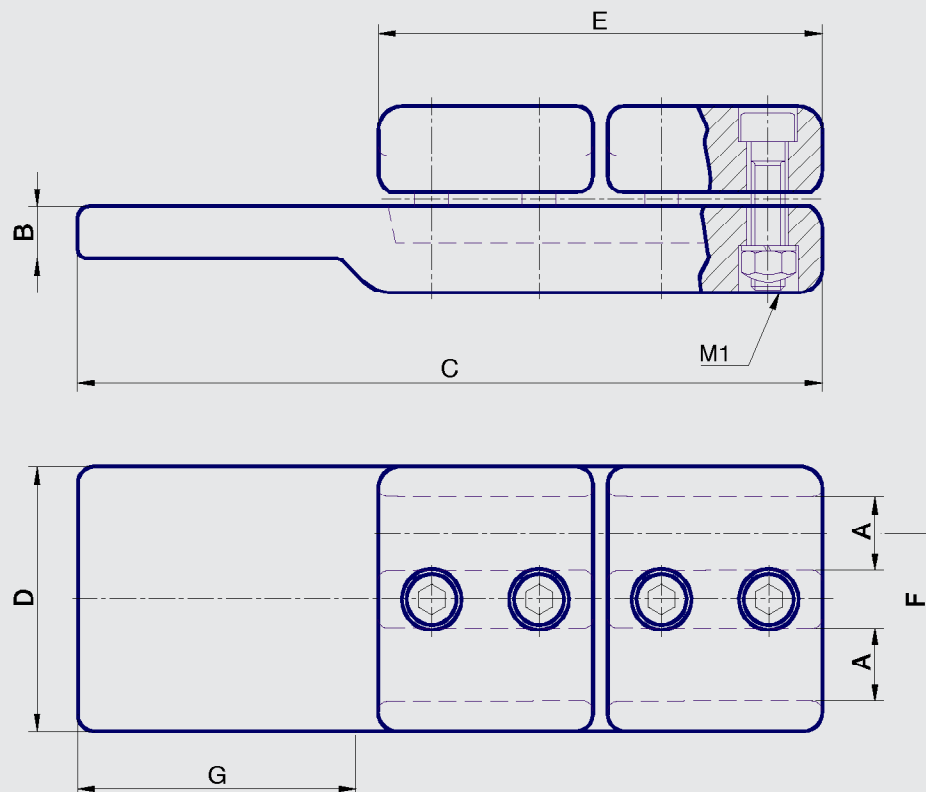

Katalogski broj Catalogue No.	Prečnik provodnika Diameter Conductor A (mm)	Dimenzije - Dimensions							Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	M1 (mm)	
AM212 22 110 50	23 – 26	15	270	110	160	50	110	M12	3,400
AM212 25 110 50	23 – 26	17	275	110	160	50	110	M12	3,500
AM212 25 150 50	26 – 29	17	280	150	170	50	110	M12	3,800
AM212 27 110 50	26 – 29	20	285	110	170	50	110	M12	3,900
AM212 27 150 50	29 – 32	20	290	150	180	50	110	M12	4,100
AM212 30 110 50	29 – 32	22	295	110	180	50	110	M12	4,200
AM212 30 150 50	29 – 32	22	300	150	180	50	110	M12	4,400

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.



Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored katalogskog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

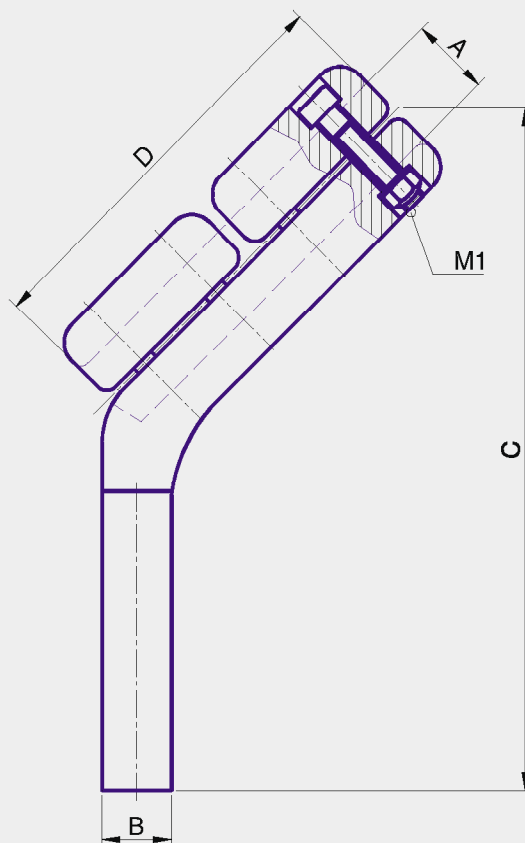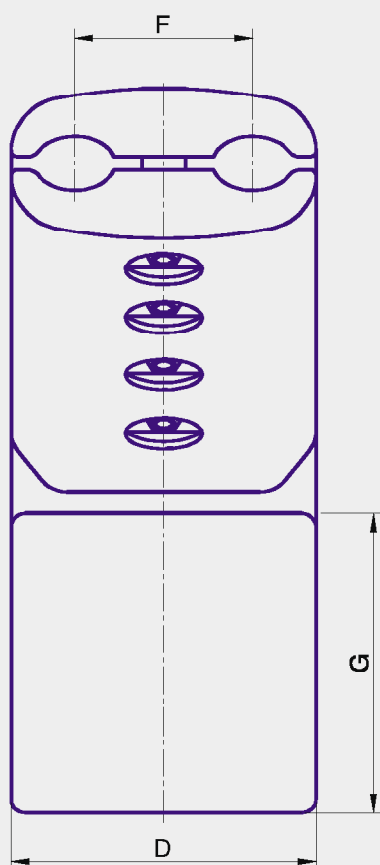

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor A (mm)	Dimenzije - Dimensions							Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	M1 (mm)	
AM222 22 110 50	23 – 26	15	200	110	160	50	110	M12	3,500
AM222 25 110 50	23 – 26	17	205	110	160	50	110	M12	3,600
AM222 25 150 50	26 – 29	17	200	150	170	50	110	M12	3,900
AM222 27 110 50	26 – 29	20	205	110	170	50	110	M12	4,000
AM222 27 150 50	29 – 32	20	200	150	180	50	110	M12	4,200
AM222 30 110 50	29 – 32	22	205	110	180	50	110	M12	4,300
AM222 30 150 50	29 – 32	22	210	150	180	50	110	M12	4,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.



Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

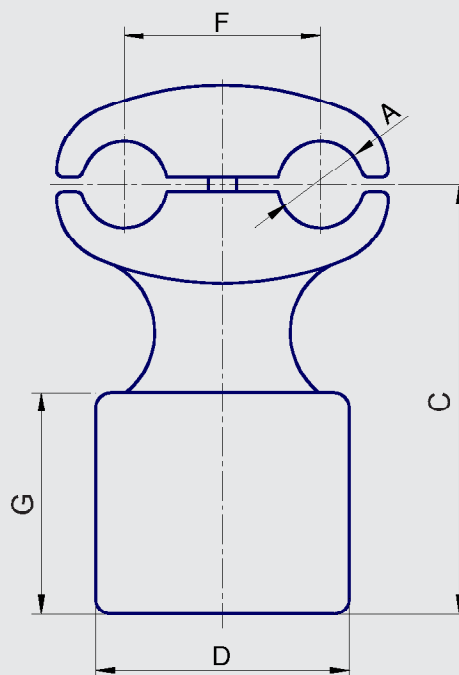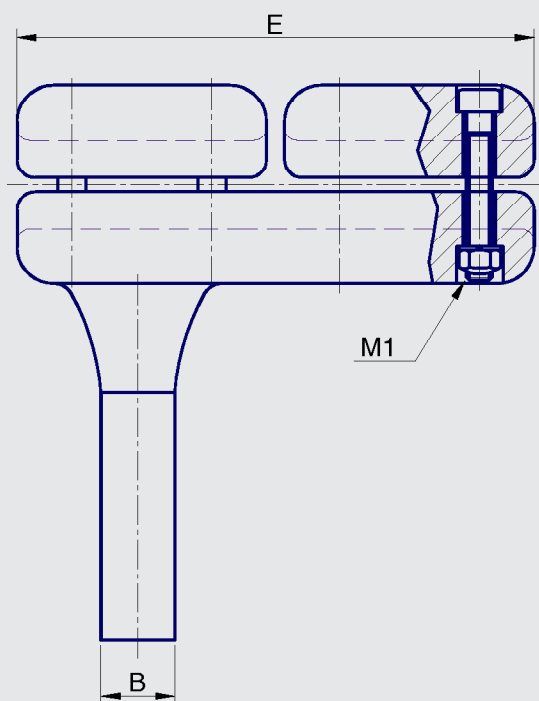

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor	Dimenzije - Dimensions							Težina Weight
		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	
AM232 22 110 50	23 – 26	15	200	110	160	50	110	M12	3,700
AM232 25 110 50	23 – 26	17	205	110	160	50	110	M12	3,800
AM232 25 150 50	26 – 29	17	200	150	170	50	110	M12	4,100
AM232 27 110 50	26 – 29	20	205	110	170	50	110	M12	4,200
AM232 27 150 50	29 – 32	20	200	150	180	50	110	M12	4,400
AM232 30 110 50	29 – 32	22	205	110	180	50	110	M12	4,500
AM232 30 150 50	29 – 32	22	210	150	180	50	110	M12	4,700

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

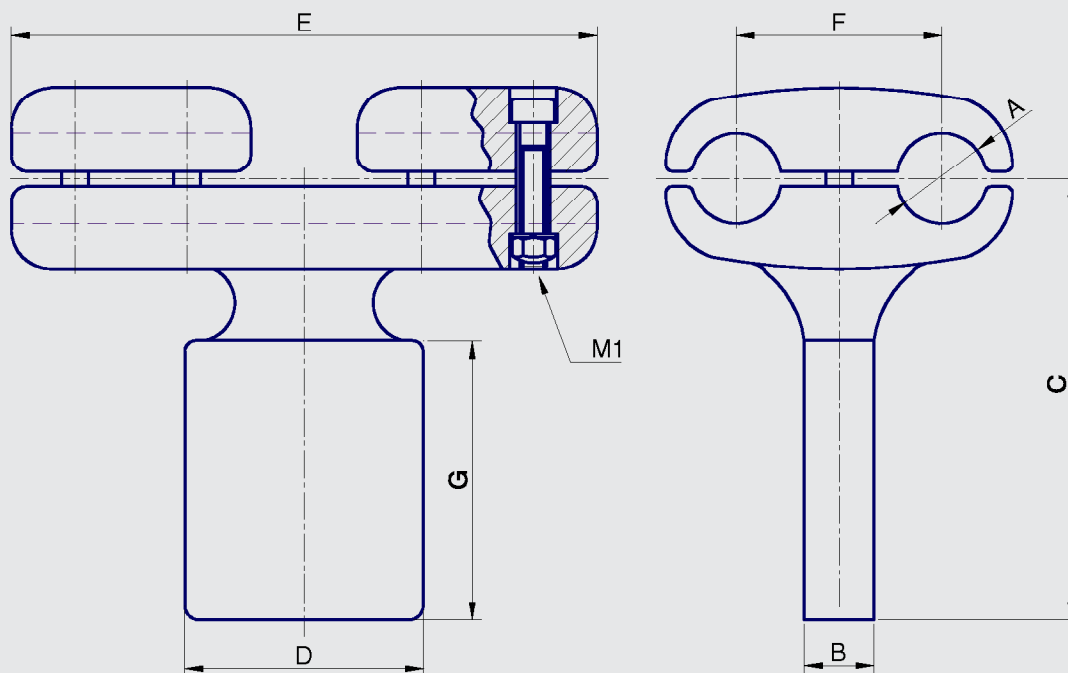

Kataloški broj Catalogue No.	Prečnik provodnika Diameter Conductor	Dimenzije - Dimensions							Težina Weight
		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	
AM242 22 30 50	23 – 26		15	200	110	200	50	110	M12 3,900
AM242 25 40 50	23 – 26		17	205	110	200	50	110	M12 4,000
AM242 25 30 50	26 – 29		17	200	150	220	50	110	M12 4,300
AM242 27 40 50	26 – 29		20	205	110	220	50	110	M12 4,400
AM242 27 30 50	29 – 32		20	200	150	220	50	110	M12 4,600
AM242 30 40 50	29 – 32		22	205	110	220	50	110	M12 4,700
AM242 30 50 50	29 – 32		22	210	150	220	50	110	M12 4,900

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

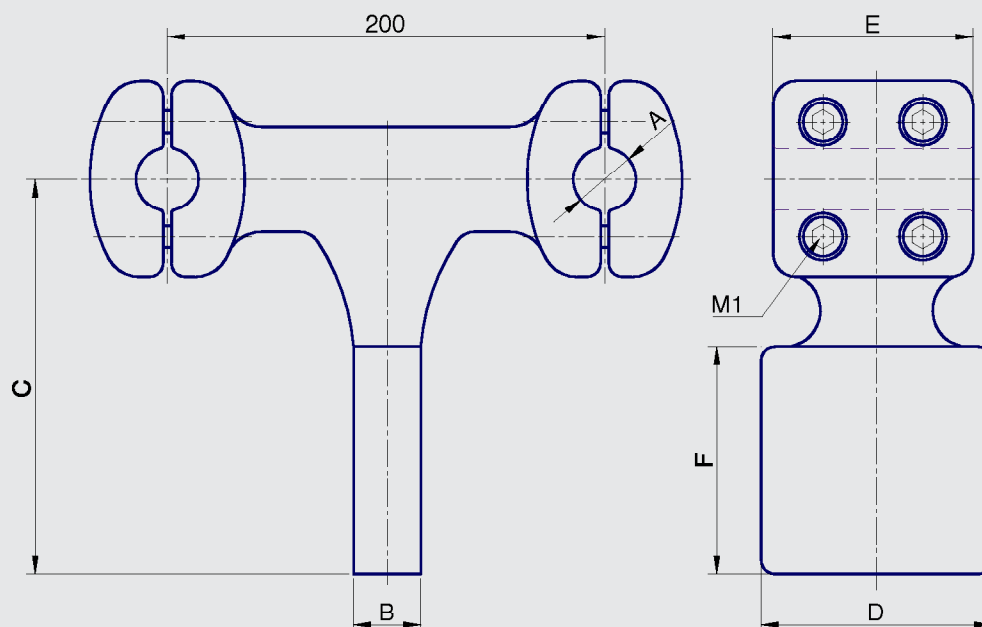

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter A (mm)	Dimenzije - Dimensions						Težina Weight (≈kg)
		B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M1 (mm)	
AM242 22 110 400	23 – 26	15	200	110	90	110	M12	3,300
AM242 25 110 400	23 – 26	17	205	110	90	110	M12	3,500
AM242 25 150 400	26 – 29	17	200	150	90	110	M12	3,800
AM242 27 110 400	26 – 29	20	205	110	90	110	M12	3,900
AM242 27 150 400	29 – 32	20	200	150	100	110	M12	4,100
AM242 30 110 400	29 – 32	22	205	110	100	110	M12	4,300
AM242 30 150 400	29 – 32	22	210	150	100	110	M12	4,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

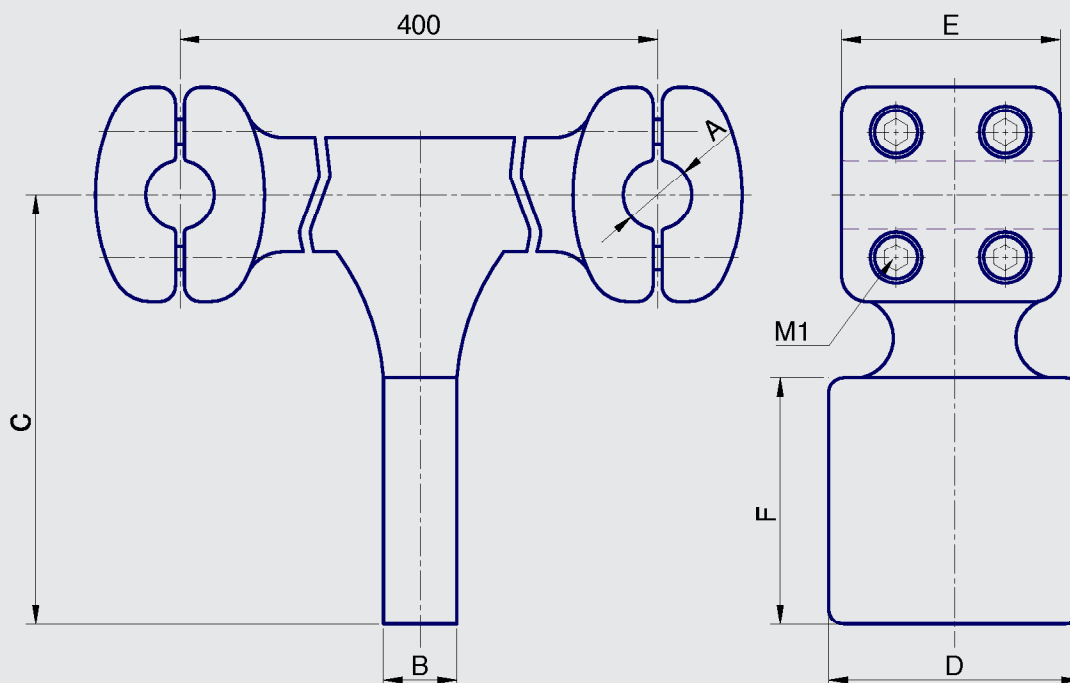

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter	Dimenzije - Dimensions						Težina Weight
		B	C	D	E	F	M1	
	A (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM242 22 110 400	23 – 26	15	200	110	90	110	M12	4,000
AM242 25 150 400	23 – 26	17	205	110	90	110	M12	4,200
AM242 25 110 400	26 – 29	17	200	150	90	110	M12	4,300
AM242 27 150 400	26 – 29	20	205	110	90	110	M12	4,600
AM242 27 110 400	29 – 32	20	200	150	100	110	M12	5,100
AM242 30 150 400	29 – 32	22	205	110	100	110	M12	5,500
AM242 30 110 400	29 – 32	22	210	150	100	110	M12	5,900

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Cu/Zn ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Cu/Zn plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

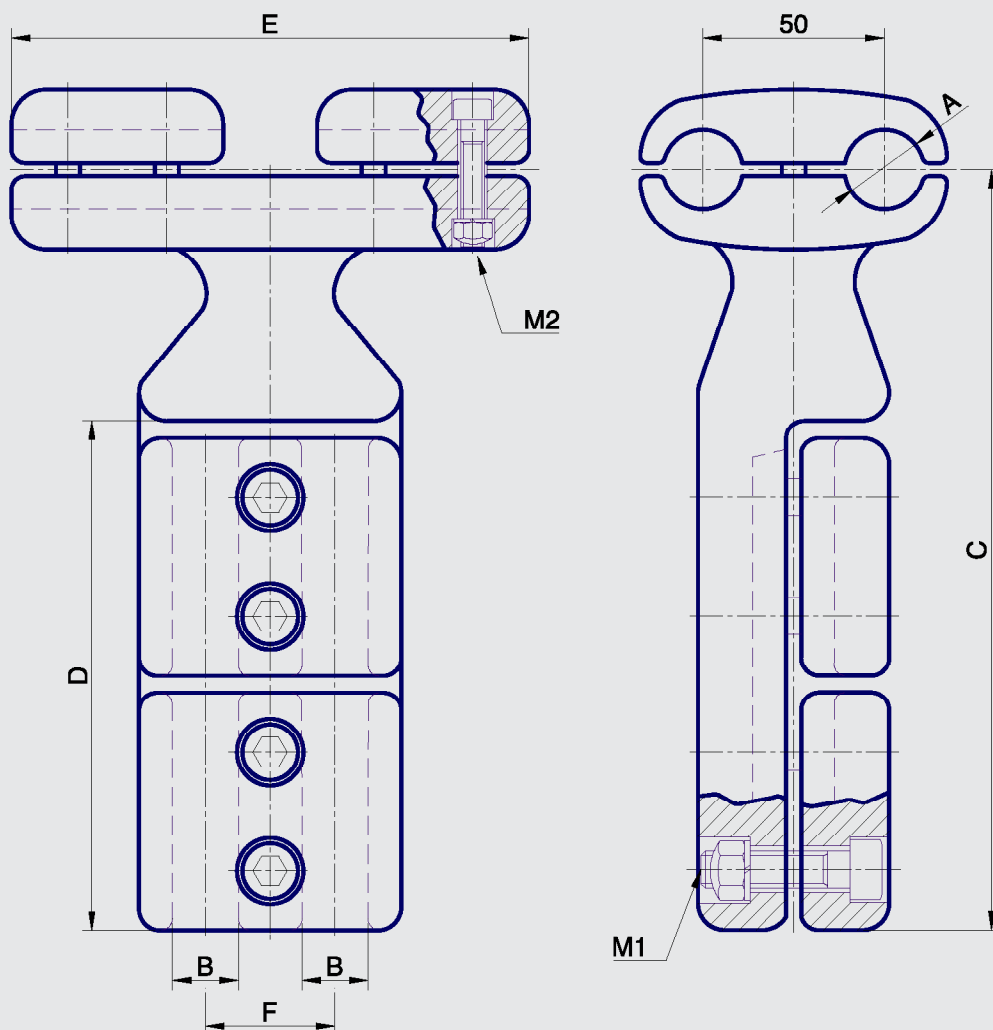

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight (≈kg)
	Provodnik	Provodnik	C	D	E	F	M1	M2	
	Conductor	Conductor							
	A (mm)	B (mm)							
AM052 25 25 50	23 – 26	23 – 26	290	175	160	50	M12	M12	7,100
AM052 27 25 50	26 – 29	23 – 26	290	175	160	50	M12	M12	7,600
AM052 27 27 50	26 – 29	26 – 29	310	195	170	50	M12	M12	8,000
AM052 30 25 50	29 – 32	23 – 26	290	175	170	50	M12	M12	8,500
AM052 30 27 50	29 – 32	26 – 29	310	195	180	50	M12	M12	9,000
AM052 30 30 50	29 – 32	29 – 32	315	200	180	50	M12	M12	9,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

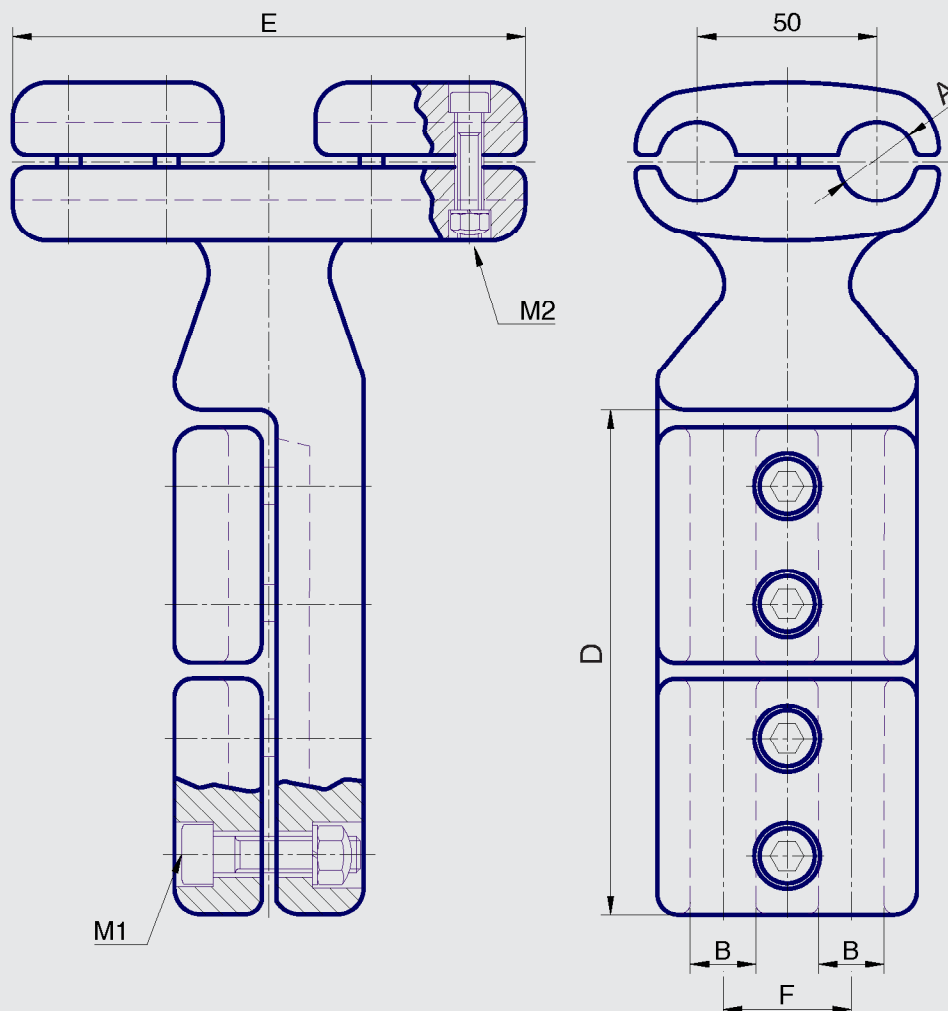

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>						Težina <i>Weight</i> (≈kg)
	Provodnik	Provodnik	C	D	E	F	M1	M2	
	<i>Conductor</i>	<i>Conductor</i>							
	A (mm)	B (mm)							
AM062 25 25 50	23 – 26	23 – 26	290	175	160	50	M12	M12	7,100
AM062 27 25 50	26 – 29	23 – 26	290	175	160	50	M12	M12	7,600
AM062 27 27 50	26 – 29	26 – 29	310	195	170	50	M12	M12	8,000
AM062 30 25 50	29 – 32	23 – 26	290	175	170	50	M12	M12	8,500
AM062 30 27 50	29 – 32	26 – 29	310	195	180	50	M12	M12	9,000
AM062 30 30 50	29 – 32	29 – 32	315	200	180	50	M12	M12	9,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

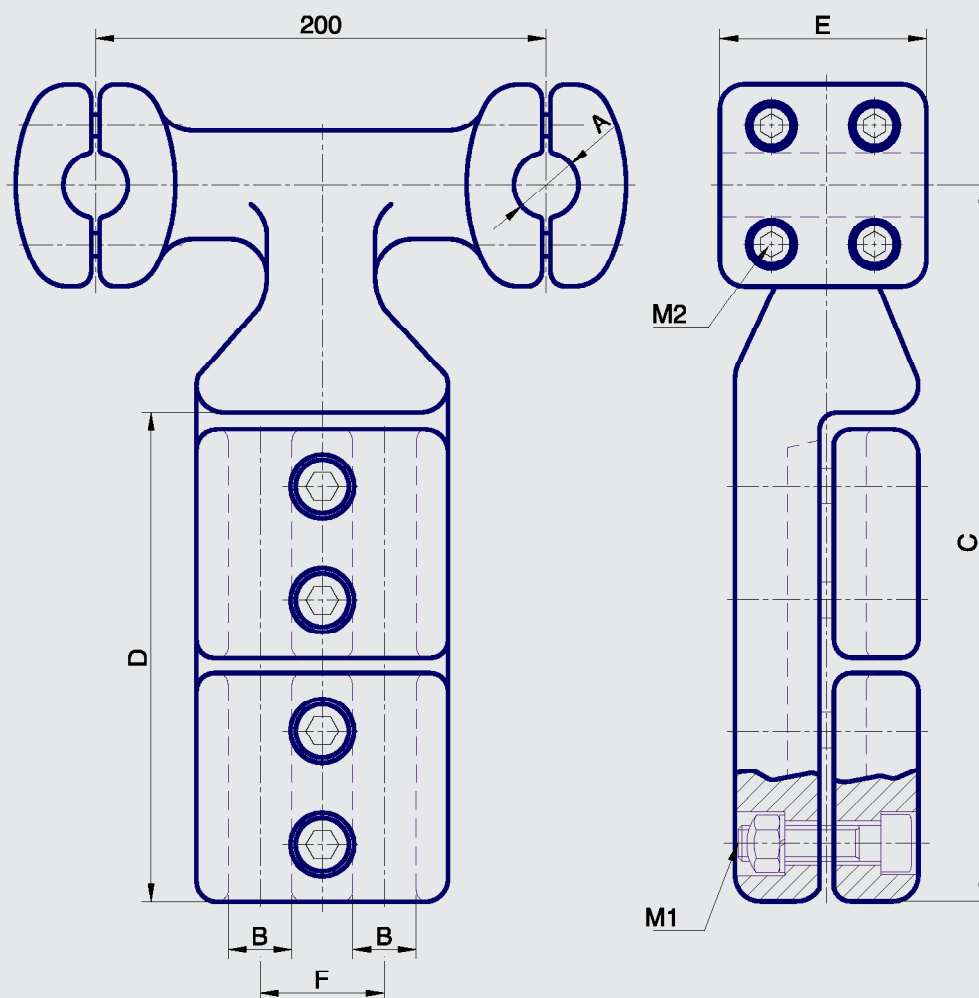

Kataloški broj Catalogue No.	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>						Težina Weight
	Provodnik	Provodnik	C	D	E	F	M1	M2	
	Conductor	Conductor							
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM052 25 25 200	23 – 26	23 – 26	290	175	160	50	M12	M12	7,200
AM052 27 25 200	26 – 29	23 – 26	290	175	160	50	M12	M12	7,800
AM052 27 27 200	26 – 29	26 – 29	310	195	170	50	M12	M12	8,200
AM052 30 25 200	29 – 32	23 – 26	290	175	170	50	M12	M12	8,800
AM052 30 27 200	29 – 32	26 – 29	310	195	180	50	M12	M12	9,100
AM052 30 30 200	29 – 32	29 – 32	315	200	180	50	M12	M12	9,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

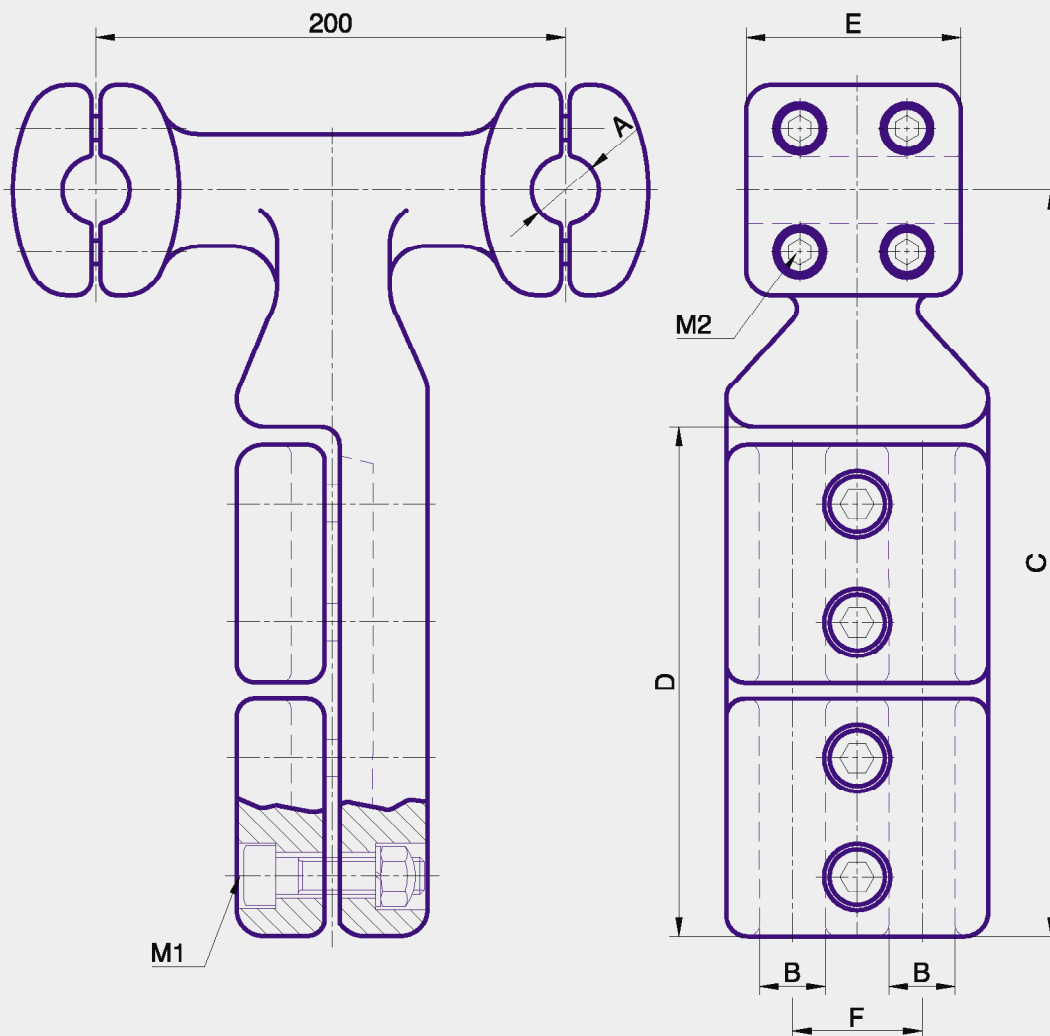

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor	Provodnik Conductor	C	D	E	F	M1	M2	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
AM062 25 25 200	23 – 26	23 – 26	290	175	160	50	M12	M12	7,200
AM062 27 25 200	26 – 29	23 – 26	290	175	160	50	M12	M12	7,800
AM062 27 27 200	26 – 29	26 – 29	310	195	170	50	M12	M12	8,200
AM062 30 25 200	29 – 32	23 – 26	290	175	170	50	M12	M12	8,800
AM062 30 27 200	29 – 32	26 – 29	310	195	180	50	M12	M12	9,100
AM062 30 30 200	29 – 32	29 – 32	315	200	180	50	M12	M12	9,500

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.


Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

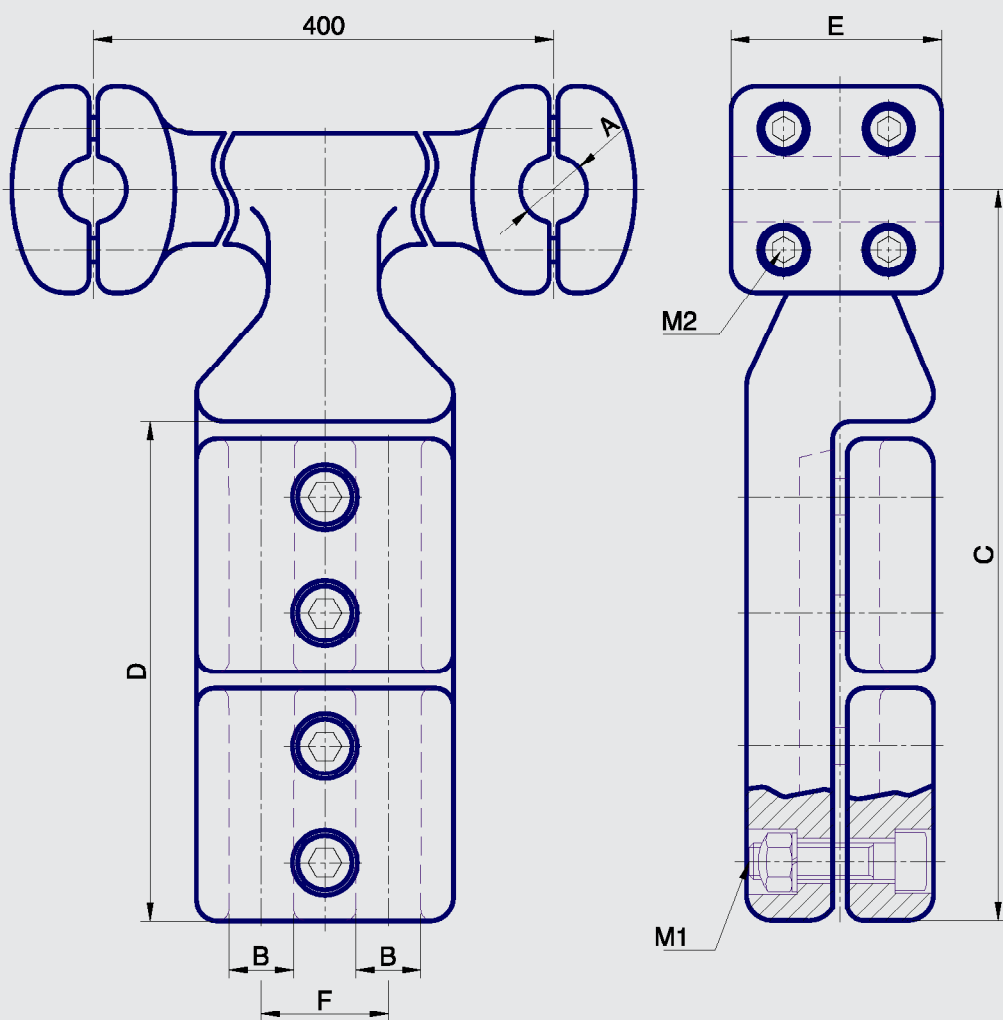

Kataloški broj Catalogue No.	Prečnik - Diameter Provodnik Conductor		Dimenzije - Dimensions						Težina Weight
	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	M1 (mm)	M2 (mm)	
AM052 25 25 400	23 - 26	23 - 26	290	175	160	50	M12	M12	7,790
AM052 27 25 400	26 - 29	23 - 26	290	175	160	50	M12	M12	8,050
AM052 27 27 400	26 - 29	26 - 29	310	195	170	50	M12	M12	8,560
AM052 30 25 400	29 - 32	23 - 26	290	175	170	50	M12	M12	9,260
AM052 30 27 400	29 - 32	26 - 29	310	195	180	50	M12	M12	9,800
AM052 30 30 400	29 - 32	29 - 32	315	200	180	50	M12	M12	10,350

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Al ili Al-Fe provodnik.

Connectors are applied for connection of Al or Al-Fe conductor to Al or Al-Fe conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors and rivet or tube for which the connector is to be applied to.